

RELEASABLE PUSH MOUNT TIE WITH CUP



Technical description

Material: See table

Colour: Natural or black


Flammability: V2 (UL94)

Operating temperature:

-35°C ~ +85°C

D= approximate distance between cable and panel

All dimensions are in mm.

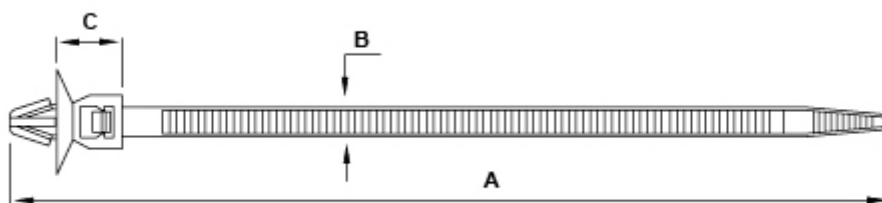

Code	A	B	C	D	Colour	Mounting hole	Thickness	Material	Min. loop tensile strenght (kg)	MOQ-Pcs
1196AA00	108,0	4,8	11,0	9,0	Naturale - Natural	Ø 6,5	0,6 - 2,0	PA 66	2 - 16	1.000
1196AA01	108,0	4,8	11,0	9,0	Nero - Black	Ø 6,5	0,6 - 2,0	PA 66	2 - 16	1.000
5447AA00	147,0	4,9	11,0	9,0	Naturale - Natural	Ø 6,5	0,6 - 2,0	PA 66	6 - 35	1.000
5447AA01	147,0	4,9	11,0	9,0	Nero - Black	Ø 6,5	0,6 - 2,0	PA 66	6 - 35	1.000