

RELEASABLE RIVET



Technical description

Material body: POM


Material rivet: PBT 15% GV

UL Flammability body: HB (UL 94)

UL Flammability rivet: V0 (UL 94)

Operating temperature: -35°C ~ +100°C

All dimensions are in mm.

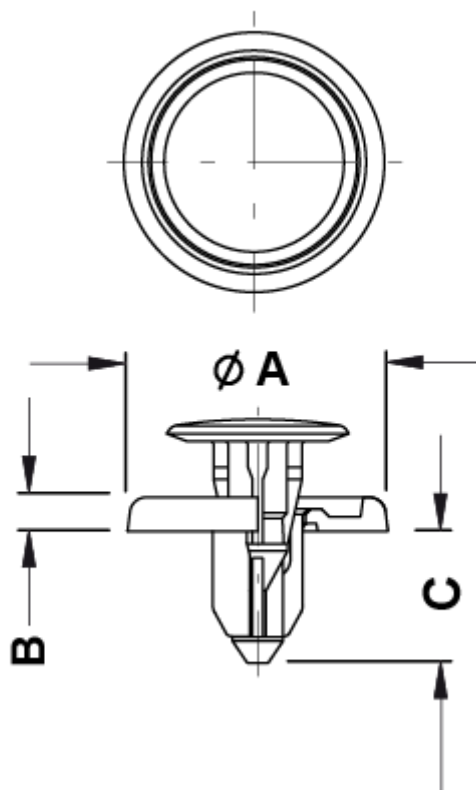

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
10519GA01	20,0	2,6	8,1	Ø 7,0	1,5 - 2,5	1.000