

ROUND SPACERS INNER DIAM. 3,0/ OUTER DIAM. 4,0



Technical description

Material: PA 6 , 25%GV

UL Flammability: HB (UL 94)

Colour: Black

Operating temperature: -35°C ~ +100°C

Alternative:


Material: polystyrene

UL Flammability: HB (UL 94)

Colour: White

Operating temperature: -40°C ~ +70°C

All dimensions are in mm.

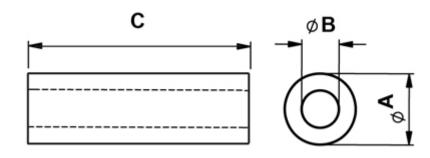

Code	А	В	С	MOQ-Pcs
10087BB0102.0	4,0	3,0	2,0	500
10087BB0103.0	4,0	3,0	3,0	500

Fastpoint srl - Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso. Round spacers inner diam. 3,0/ outer diam. 4,0 | 1



FASTPOINT SRL | Via Industria 27, Camponogara (VE) T +39 041 462435 | F +39 041 463903 P IVA 01746590288 | Email: info@fastpointweb.it

Code	Α	В	С	MOQ-Pcs
10087BB0104.0	4,0	3,0	4,0	500
10087BB0105.0	4,0	3,0	5,0	500
10087BB0106.0	4,0	3,0	6,0	500
10087BB0107.0	4,0	3,0	7,0	500
10087BB0108.0	4,0	3,0	8,0	500
10087BB0109.0	4,0	3,0	9,0	500
10087BB0110.0	4,0	3,0	10,0	500
10087BB0111.0	4,0	3,0	11,0	500
10087BB0112.0	4,0	3,0	12,0	500
10087BB0113.0	4,0	3,0	13,0	500
10087BB0114.0	4,0	3,0	14,0	500
10087BB0115.0	4,0	3,0	15,0	500
10087BB0116.0	4,0	3,0	16,0	500
10087BB0117.0	4,0	3,0	17,0	500
10087BB0118.0	4,0	3,0	18,0	500
10087BB0119.0	4,0	3,0	19,0	500
10087BB0120.0	4,0	3,0	20,0	500