

SCREW MOUNTING CABLE TIES



Technical description

Material: PA 6.6


Colour: Natural

Flammability: V2 (UL 94)

Operating temperature:

-35°C ~ +85°C

All dimensions are in mm.

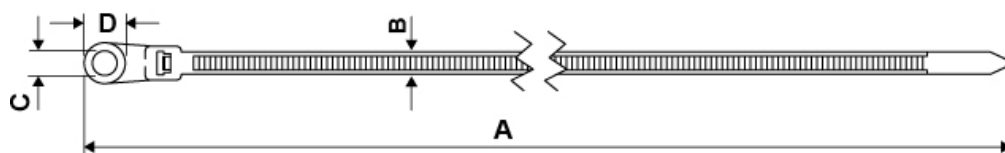

Code	A	B	C	D	Max cable	Min. loop tensile strenght (kg)	MOQ-Pcs
2436AA00	150,0	3,6	4,8	8,0	32,0	18,2	1.000
2437AA00	200,0	4,8	5,5	9,6	50,0	22,2	1.000
2438AA00	215,0	7,6	5,7	11,5	50,0	54,4	100
2439AA00	375,0	7,6	6,3	11,5	98,0	54,4	100
4771AA00	110,0	2,5	3,2	6,2	22,0	8,1	1.000
4772AA00	310,0	4,8	5,5	9,8	76,0	22,2	1.000