

SCRIVETS



Technical description


Material: PA 6.6

Colour: Black

UL Flammability: V2 (UL 94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm.

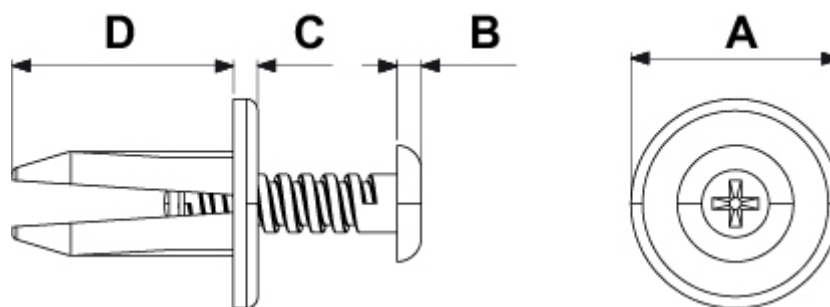

Code	A	B	C	D	Mounting hole	Thickness	Type	MOQ-Pcs
0962AA01	18,5	2,0	2,5	19,0	Ø 8,0	6,0 - 14,0	5	2.500
2494AA01	12,8	3,0	2,0	11,5	Ø 6,2-6,5	3,0 - 6,0	4	2.500
8110AA01	12,0	2,3	1,55	11,0	Ø 5,0	3,8 - 6,0	1	1.000
8116AA01	16,0	2,3	1,6	11,0	Ø 6,5	4,0 - 6,5	2	1.000
8117AA01	20,0	2,3	1,25	14,0	Ø 8,0	3,0 - 10,0	3	1.000
8119AA01	18,0	2,1	2,1	19,0	Ø 9,0	6,0 - 14,0	6	1.000
8120AA01	19,0	2,0	2,2	19,0	Ø 10,0	6,0 - 14,0	7	1.000