



SNAP-FIT IP67 METRIC GROMMETS



RAL 7035

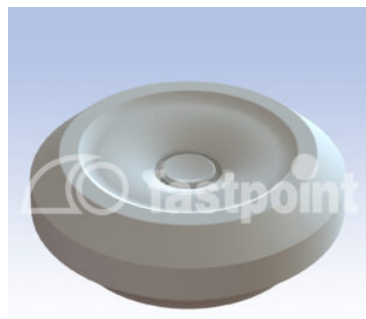

RAL 9005

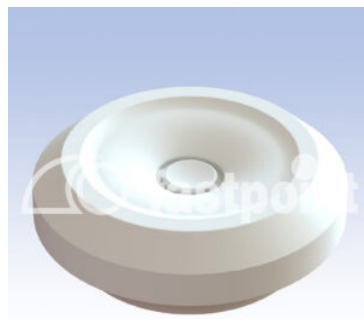

RAL 9010

Technical description

Material: TPE

Colour: See table


Working temperature: -50°C ~ +125°C

Protection grade: IP67

All dimensions are in mm

SEMKO conformity

Available in TPE V0 (UL94) by special request

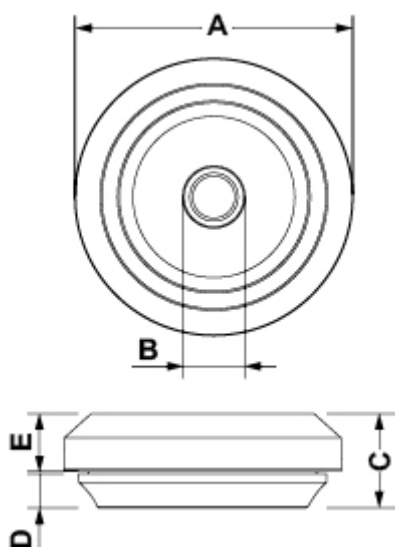

Code	A	B	C	D	E	Size	Mounting hole	Thickness	Colour	Ø cable diameter	MOQ-Pcs
9040PF019005	23,5	4,0	11,0	4,0	6,7	M16	16,5	0,5 - 3	RAL 9005	5 - 10	500
9040PF029010	23,5	4,0	11,0	4,0	6,7	M16	16,5	0,5 - 3	RAL 9010	5 - 10	500
9040PF117035	23,5	4,0	11,0	4,0	6,7	M16	16,5	0,5 - 3	RAL 7035	5 - 10	500
9041PF019005	27,5	5,0	11,0	4,0	6,7	M20	20,5	0,5 - 3	RAL 9005	6 - 13	500

Code	A	B	C	D	E	Size	Mounting hole	Thickness	Colour	Ø cable diameter	MOQ-Pcs
9041PF029010	27,5	5,0	11,0	4,0	6,7	M20	20,5	0,5 - 3	RAL 9010	6 - 13	500
9041PF117035	27,5	5,0	11,0	4,0	6,7	M20	20,5	0,5 - 3	RAL 7035	6 - 13	500
9042PF019005	32,5	7,0	11,0	4,0	6,7	M25	25,5	0,5 - 3,5	RAL 9005	8 - 17	500
9042PF029010	32,5	7,0	11,0	4,0	6,7	M25	25,5	0,5 - 3,5	RAL 9010	8 - 17	500
9042PF117035	32,5	7,0	11,0	4,0	6,7	M25	25,5	0,5 - 3,5	RAL 7035	8 - 17	500
9043PF019005	39,5	11,0	11,0	4,0	6,7	M32	32,5	0,5 - 4,5	RAL 9005	12 - 24	500
9043PF029010	39,5	11,0	11,0	4,0	6,7	M32	32,5	0,5 - 4,5	RAL 9010	12 - 24	500
9043PF117035	39,5	11,0	11,0	4,0	6,7	M32	32,5	0,5 - 4,5	RAL 7035	12 - 24	500
9044PF019005	47,5	18,0	13,5	4,8	7,4	M40	40,5	1,5 - 4,5	RAL 9005	19 - 30	500
9044PF029010	47,5	18,0	13,5	4,8	7,4	M40	40,5	1,5 - 4,5	RAL 9010	19 - 30	500
9044PF117035	47,5	18,0	13,5	4,8	7,4	M40	40,5	1,5 - 4,5	RAL 7035	19 - 30	500