

SNAP RIVET



Technical description

Material: PA 6


Colour: Black

(special request Colour White)

UL Flammability: V2 (UL 94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm.

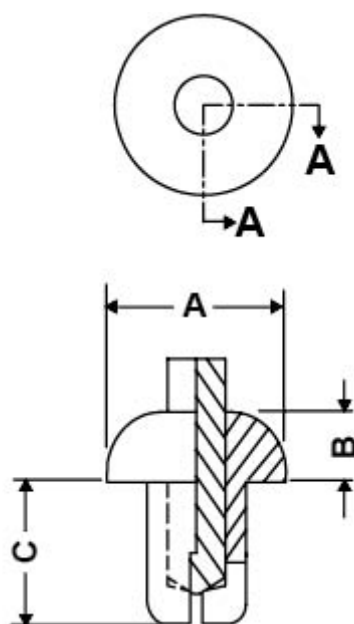

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
9747AA01	5,8	2,0	4,6	Ø 3,1	2,0 - 3,0	1.000
9748AA01	5,8	2,0	5,6	Ø 3,1	3,0 - 4,1	1.000
9749AA01	8,1	2,2	5,1	Ø 4,1	2,0 - 3,5	1.000
9750AA01	8,1	2,2	6,1	Ø 4,1	3,5 - 4,5	1.000
9751AA01	9,9	3,3	5,1	Ø 4,8	1,3 - 3,0	1.000

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
9752AA01	9,4	2,8	5,1	Ø 5,1	2,0 - 3,0	1.000
9753AA01	9,4	2,8	6,1	Ø 5,1	3,0 - 4,0	1.000
9754AA01	9,4	2,8	7,1	Ø 5,1	4,0 - 5,0	1.000
9755AA01	9,4	2,8	8,1	Ø 5,1	5,0 - 6,0	1.000
9756AA01	9,4	2,8	8,9	Ø 5,1	6,0 - 7,0	1.000
9757AA01	9,4	2,8	9,9	Ø 5,1	7,0 - 8,0	1.000
9907AA01	17,0	5,5	15,5	Ø 8,6	6,0 - 11,0	1.000
9908AA01	17,0	5,5	21,0	Ø 8,6	12,0 - 17,0	1.000