


SNAP RIVET

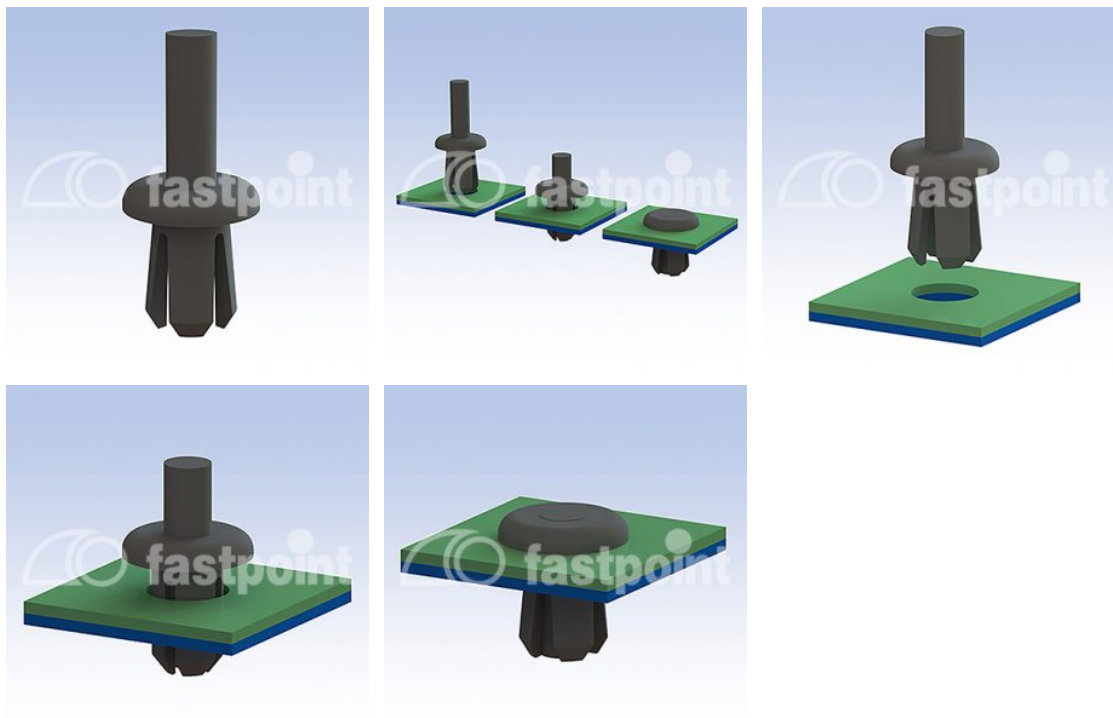

Technical description

Material: PA 6.6

Colour: See table


UL Flammability: V2 (UL 94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm

Predriven rivet:

0202AA01 / 0209AA01 / 5594AA01

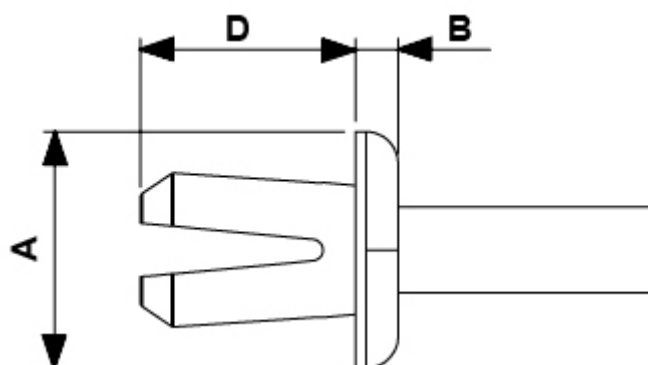

Code	A	B	D	Mounting hole	Thickness	Colour	MOQ-Pcs
0201AA01	6,3	1,8	6,5	Ø 3,6	3,0 - 5,0	Nero -Black - Schwarz - Negro	5.000
6715AA00	7,14	1,9	7,6	Ø 4,0	1,6 - 5,5	Naturale	1.000
6716AA00	7,14	1,9	7,4	Ø 4,8	1,6 - 5,5	Naturale	1.000
0207AA01							
0209AA01	11,0	2,0	22,0	Ø 6,2	2,5 - 7,5	Nero-Black-Schwarz	2.500
0209AA00							
0458AA01	15,0	2,0	12,0	Ø 6,5	2,5 - 10	Nero	2.500
2531AA01	14,0	2,0	15,0	Ø 6,5	3,5 - 11	Nero o naturale	2.500
14113AA01	16,0	2,0	12,0	Ø 7,9 - 8,7	4,0 - 7,0	Nero	1.000
5594AA01	16,0	2,0	13,0	Ø 8,0	3,0 - 6,0	Nero	1.000