

SNAP RIVET



Technical description

Material: rivet: PA 6

Material: pin: POM


Colour: Black

UL Flammability: rivet V2 (UL 94)

UL Flammability: pin HB (UL 94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm.

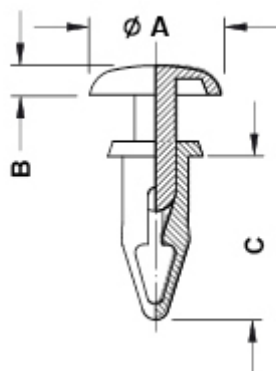

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
9825AA01	6,4	1,6	9,8	Ø 3,6	2,0 - 3,5	1.000
9826AA01	6,4	1,6	11,4	Ø 3,6	3,5 - 5,0	1.000
9827AA01	6,4	1,6	13,6	Ø 3,6	5,0 - 6,5	1.000
9828AA01	8,0	1,8	10,0	Ø 4,1	2,0 - 3,5	1.000
9830AA01	8,0	1,8	14,0	Ø 4,1	5,5 - 7,5	1.000
9831AA01	9,0	2,2	11,4	Ø 4,9	2,0 - 3,5	1.000
9832AA01	9,0	2,2	13,2	Ø 4,9	3,5 - 5,5	1.000

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
9833AA01	9,0	2,2	15,2	Ø 4,9	5,5 - 7,5	1.000