


SPLITTABLE CABLE GLAND OSF



Technical description

Material: PC **Color:** see table **Flammability:** self-extinguishing according to UL94-V0 **Temperature:** -40°C... +130°C (static) **Properties:** halogen-free, silicone-free, flame class V0 both colors, comply with ASTM IRM 903 , UL 157

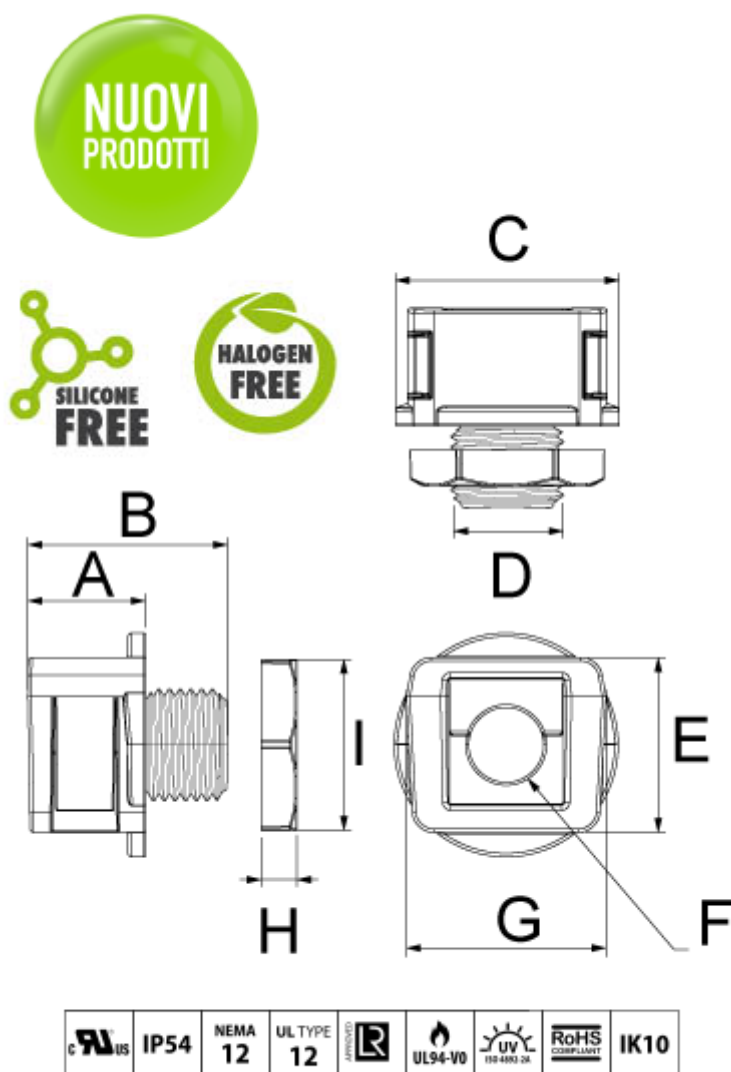

Code	A	B	C	D	E	F	G	H	I	Colour	MOQ-Pcs
15939FG01	16,5	28,0	Ø 31,4	M16 X 1,5	24,5	10,5	28,0	5,0	24,0	Nero - Black - Schwarz	10
15939FG11	16,5	28,0	Ø 31,4	M16 X 1,5	24,5	10,5	28,0	5,0	24,0	Grigio - Gray - Grau	10
15940FG01	16,5	28,0	Ø 31,4	M20 X 1,5	24,5	14,5	28,0	7,0	26,0	Nero - Black - Schwarz	10
15940FG11	16,5	28,0	Ø 31,4	M20 X 1,5	24,5	14,5	28,0	7,0	26,0	Grigio - Gray - Grau	10

Code	A	B	C	D	E	F	G	H	I	Colour	MOQ-Pcs
15941FG01	16,5	28,0	Ø 31,4	M25 X 1,5	24,5	28,0	7,0	32,0	Nero - Black - Schwarz	10	
15941FG11	16,5	28,0	Ø 31,4	M25 X 1,5	24,5	28,0	7,0	32,0	Grigio - Gray - Grau	10	
15942FG01	16,5	28,0	Ø 38,6	M32 x 1,5	24,5	28,0	7,0	41,0	Nero - Black - Schwarz	10	
15942FG11	16,5	28,0	Ø 38,6	M32 x 1,5	24,5	28,0	7,0	41,0	Grigio - Gray - Grau	10	