

THREADED PIN WITH HEXAGONAL SOCKET DIN 913



Technical description

Material: PA 6


Colour : Natural

estimate according: DIN 913

Operating temperature:

-30°C ~ + max. 100° C

All dimensions are in mm.

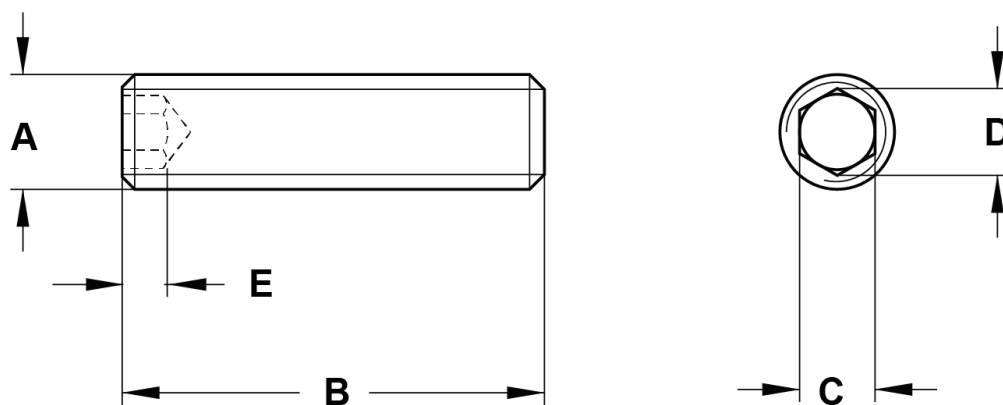

Code	A	B	C	D	E	MOQ-Pcs
10338AA0005.0	M 5	5,0	2,52	2,56	2,0	1.000
10338AA0006.0	M 5	6,0	2,52	2,56	2,0	1.000
10338AA0008.0	M 5	8,0	2,52	2,56	2,0	1.000
10338AA0010.0	M 5	10,0	2,52	2,56	2,0	1.000
10338AA0012.0	M 5	12,0	2,52	2,56	2,0	1.000
10338AA0016.0	M 5	16,0	2,52	2,56	2,0	1.000

Code	A	B	C	D	E	MOQ-Pcs
10338AA0018.0	M 5	18,0	2,52	2,56	2,0	1.000
10338AA0021.0	M 5	21,0	2,52	2,56	2,0	1.000
10338AA0025.0	M 5	25,0	2,52	2,56	2,0	1.000
10338AA0030.0	M 5	30,0	2,52	2,56	2,0	1.000
10339AA0005.0	M 6	5,0	3,02	3,08	2,0	1.000
10339AA0006.0	M 6	6,0	3,02	3,08	2,0	1.000
10339AA0008.0	M 6	8,0	3,02	3,08	2,0	1.000
10339AA0010.0	M 6	10,0	3,02	3,08	2,0	1.000
10339AA0012.0	M 6	12,0	3,02	3,08	2,0	1.000
10339AA0013.0	M 6	13,0	3,02	3,08	2,0	1.000
10339AA0018.0	M 6	18,0	3,02	3,08	2,0	1.000
10339AA0020.0	M 6	20,0	3,02	3,08	2,0	1.000
10339AA0021.0	M 6	21,0	3,02	3,08	2,0	1.000
10339AA0026.0	M 6	26,0	3,02	3,08	2,0	1.000
10339AA0030.0	M 6	30,0	3,02	3,08	2,0	1.000
10340AA0005.0	M 8	5,0	4,02	4,095	3,0	1.000
10340AA0006.0	M 8	6,0	4,02	4,095	3,0	1.000
10340AA0008.0	M 8	8,0	4,02	4,095	3,0	1.000
10340AA0010.0	M 8	10,0	4,02	4,095	3,0	1.000
10340AA0012.0	M 8	12,0	4,02	4,095	3,0	1.000
10340AA0014.0	M 8	14,0	4,02	4,095	3,0	1.000
10340AA0016.0	M 8	16,0	4,02	4,095	3,0	1.000
10340AA0018.0	M 8	18,0	4,02	4,095	3,0	1.000
10340AA0020.0	M 8	20,0	4,02	4,095	3,0	1.000
10340AA0022.0	M 8	22,0	4,02	4,095	3,0	1.000
10340AA0026.0	M 8	26,0	4,02	4,095	3,0	1.000