

BRIDAS ATORNILLABLES



Descripción Técnica


Material: PA66

Color: Natural

Autoextinguibilidad: UL94-V2

Temperatura de trabajo: -35°C ~ +85°C

Todas las medidas están indicadas en mm

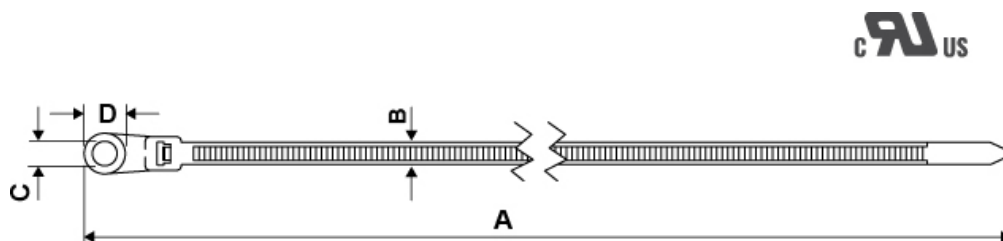

Codigo	A	B	C	D	Max cable	Carga Min. soporte (kg)	Conf./piezas
2436AA00	150,0	3,6	4,8	8,0	32,0	18,2	1.000
2437AA00	200,0	4,8	5,5	9,6	50,0	22,2	1.000
2438AA00	215,0	7,6	5,7	11,5	50,0	54,4	100
2439AA00	375,0	7,6	6,3	11,5	98,0	54,4	100
4771AA00	110,0	2,5	3,2	6,2	22,0	8,1	1.000
4772AA00	310,0	4,8	5,5	9,8	76,0	22,2	1.000