


# CLIP PARA CABLE CON BASE ADHESIVA

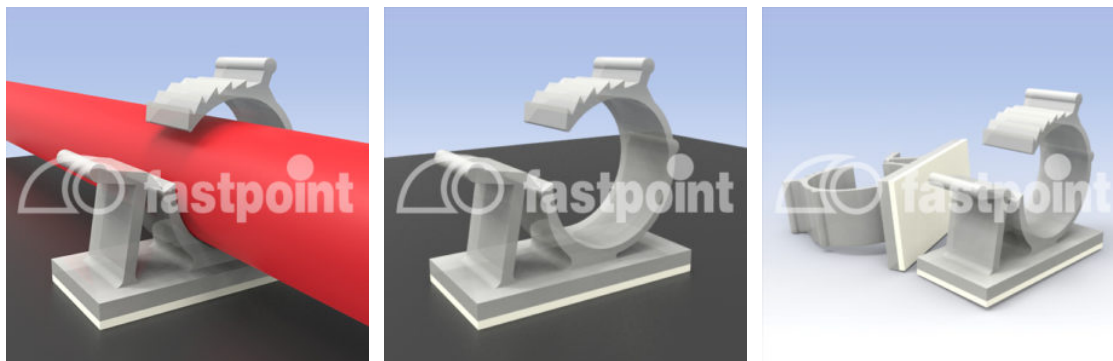

## Descripción Técnica

**Material:** PA66


**Color:** Natural

**Autoextinguibilidad:** UL94-V2

**Temperatura de trabajo:**

- **Adhesivo acrílico:** -25°C ~ +80°C

Todas las medidas están indicadas en mm

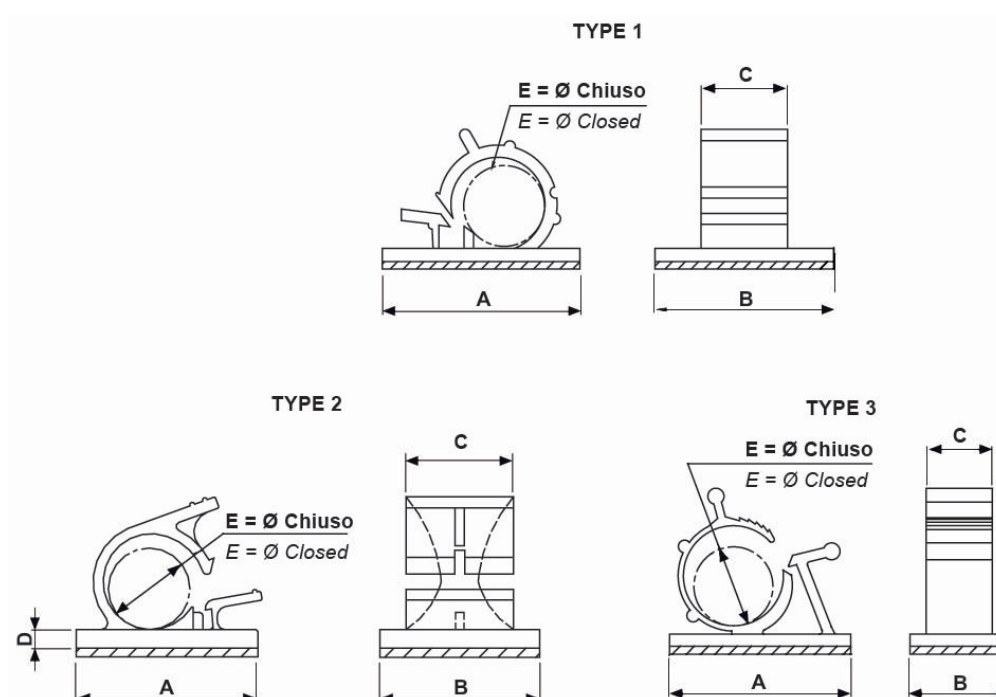

| Codigo     | A    | B    | C    | D | E      | Type | Conf./piezas |
|------------|------|------|------|---|--------|------|--------------|
| 4755AA00AS | 21,5 | 17,0 | 12,0 | - | 9 - 12 | 1    | 1.000        |

| Codigo     | A    | B    | C    | D   | E           | Type | Conf./piezas |
|------------|------|------|------|-----|-------------|------|--------------|
| 6398AA00AS | 13,0 | 10,0 | 6,8  | 2,0 | 4,0         | 2    | 1.000        |
| 6399AA00AS | 15,0 | 13,0 | 9,0  | 2,0 | 6,0         | 2    | 1.000        |
| 6400AA00AS | 21,6 | 19,0 | 12,8 | 2,2 | 9,0         | 2    | 1.000        |
| 6401AA00AS | 25,0 | 20,0 | 13,2 | 2,2 | 11,0        | 2    | 500          |
| 6402AA00AS | 32,0 | 25,4 | 16,0 | 2,1 | 13,4        | 2    | 250          |
| 6403AA00AS | 35,8 | 24,8 | 16,8 | 2,7 | 18,0        | 2    | 100          |
| 6404AA00AS | 56,1 | 50,0 | 20,1 | 2,7 | 25,4        | 2    | 50           |
| 6405AA00AS | 24,8 | 18,8 | 10,2 | -   | 7,9 - 10,3  | 3    | 250          |
| 6406AA00AS | 25,4 | 15,0 | 10,0 | -   | 11,0 - 13,3 | 3    | 250          |
| 6407AA00AS | 30,2 | 15,0 | 10,0 | -   | 11,9 - 14,3 | 3    | 250          |
| 6408AA00AS | 34,4 | 18,8 | 12,7 | -   | 14,7 - 19,1 | 3    | 100          |
| 6409AA00AS | 36,0 | 19,0 | 12,7 | -   | 18,0 - 22,0 | 3    | 100          |
| 6410AA00AS | 39,8 | 19,8 | 13,0 | -   | 22,0 - 26,5 | 3    | 100          |