

# REMACHE CON TIRADOR



## Descripción Técnica


**Material:** PA6

**Color:** Negro (disponible en color blanco bajo pedido)

**Autoextinguibilidad:** UL94-V2

**Temperatura de trabajo:** -35°C ~ +85°C

Todas las medidas están indicadas en mm

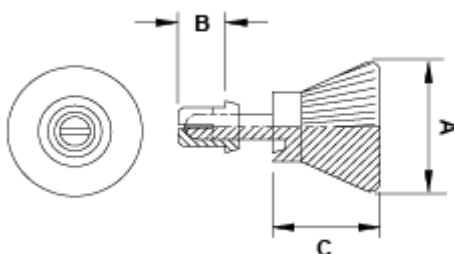

| Codigo   | A    | B   | C   | Orificio | Espesor   | Conf./piezas |
|----------|------|-----|-----|----------|-----------|--------------|
| 9758AA01 | 10,0 | 3,5 | 8,0 | Ø 3,1    | 1,0 - 2,0 | 1.000        |
| 9759AA01 | 10,0 | 4,5 | 8,0 | Ø 3,1    | 2,0 - 3,0 | 1.000        |
| 9760AA01 | 10,0 | 5,5 | 8,0 | Ø 3,1    | 3,0 - 4,0 | 1.000        |
| 9761AA01 | 10,0 | 6,5 | 8,0 | Ø 3,1    | 4,0 - 5,0 | 1.000        |
| 9762AA01 | 10,0 | 7,5 | 8,0 | Ø 3,1    | 5,0 - 6,0 | 1.000        |
| 9763AA01 | 10,0 | 8,0 | 8,0 | Ø 3,1    | 5,5 - 6,5 | 1.000        |
| 9764AA01 | 10,0 | 3,5 | 8,0 | Ø 3,6    | 1,0 - 2,0 | 1.000        |
| 9765AA01 | 10,0 | 4,5 | 8,0 | Ø 3,6    | 2,0 - 3,0 | 1.000        |
| 9766AA01 | 10,0 | 5,5 | 8,0 | Ø 3,6    | 3,0 - 3,7 | 1.000        |

| Codigo   | A    | B    | C   | Orificio | Espesor   | Conf./piezas |
|----------|------|------|-----|----------|-----------|--------------|
| 9767AA01 | 10,0 | 6,0  | 8,0 | Ø 3,6    | 3,5 - 4,5 | 1.000        |
| 9768AA01 | 10,0 | 7,0  | 8,0 | Ø 3,6    | 3,8 - 5,2 | 1.000        |
| 9769AA01 | 10,0 | 8,0  | 8,0 | Ø 3,6    | 5,3 - 6,5 | 1.000        |
| 9780AA01 | 12,0 | 5,0  | 8,0 | Ø 4,1    | 2,5 - 3,5 | 1.000        |
| 9781AA01 | 12,0 | 6,0  | 8,0 | Ø 4,1    | 3,5 - 4,5 | 1.000        |
| 9782AA01 | 12,0 | 7,0  | 8,0 | Ø 4,1    | 4,5 - 5,5 | 1.000        |
| 9783AA01 | 12,0 | 8,0  | 8,0 | Ø 4,1    | 5,5 - 6,5 | 1.000        |
| 9784AA01 | 12,0 | 9,0  | 8,0 | Ø 4,1    | 6,5 - 7,5 | 1.000        |
| 9785AA01 | 12,0 | 10,0 | 8,0 | Ø 4,1    | 7,5 - 8,5 | 1.000        |