

TORNILLO MOLETEADO DIN 464 - 465



DIN 464



DIN 465

Descrizione Técnica

Material: PA6

Color: Natural


Referencial: DIN 464 - sin ranura / DIN 465 - con ranura

Temperatura de trabajo: -30°C ~ +100°C

Todas las medidas están indicadas en mm

TYPE 1 (DIN 464)

Without slit

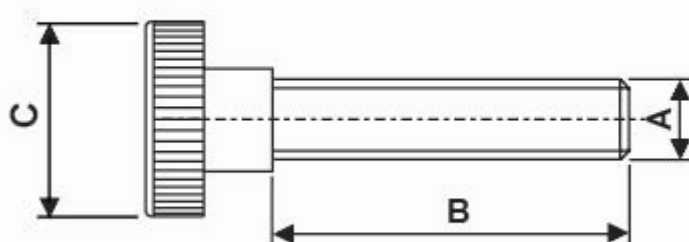

TYPE 2 (DIN 465)

With slit



Codigo	A	B	C	DIN	Type	Conf./piezas
10325AA0006.0	M 4	6,0	16,0	464	1	1.000
10325AA0008.0	M 4	8,0	16,0	464	1	1.000
10325AA0010.0	M 4	10,0	16,0	464	1	1.000

Codigo	A	B	C	DIN	Type	Conf./piezas
10325AA0012.0	M 4	12,0	16,0	464	1	1.000
10325AA0014.0	M 4	14,0	16,0	464	1	1.000
10325AA0016.0	M 4	16,0	16,0	464	1	1.000
10325AA0018.0	M 4	18,0	16,0	464	1	1.000
10325AA0020.0	M 4	20,0	16,0	464	1	1.000
10325AA0023.0	M 4	23,0	16,0	464	1	1.000
10325AA0025.0	M 4	25,0	16,0	464	1	1.000
10325AA0028.0	M 4	28,0	16,0	464	1	1.000
10325AA0030.0	M 4	30,0	16,0	464	1	1.000
10326AA0010.0	M 5	10,0	20,0	465	2	1.000
10326AA0012.0	M 5	12,0	20,0	465	2	1.000
10326AA0014.0	M 5	14,0	20,0	465	2	1.000
10326AA0016.0	M 5	16,0	20,0	465	2	1.000
10326AA0018.0	M 5	18,0	20,0	465	2	1.000
10326AA0020.0	M 5	20,0	20,0	465	2	1.000
10326AA0022.0	M 5	22,0	20,0	465	2	1.000
10326AA0024.0	M 5	24,0	20,0	465	2	1.000
10326AA0028.0	M 5	28,0	20,0	465	2	1.000
10326AA0030.0	M 5	30,0	20,0	465	2	1.000
18398AA0012.0	M 5	12,0	20,0	465	2	1.000