

TUERCA MOLETEADA



Descripción Técnica


Material: PA6

Color: Natural

Norma de referencia: DIN 466 & DIN 467

Temperatura de trabajo: -30° C ~ + Máx. 100°C

Todas las medidas están indicadas en mm

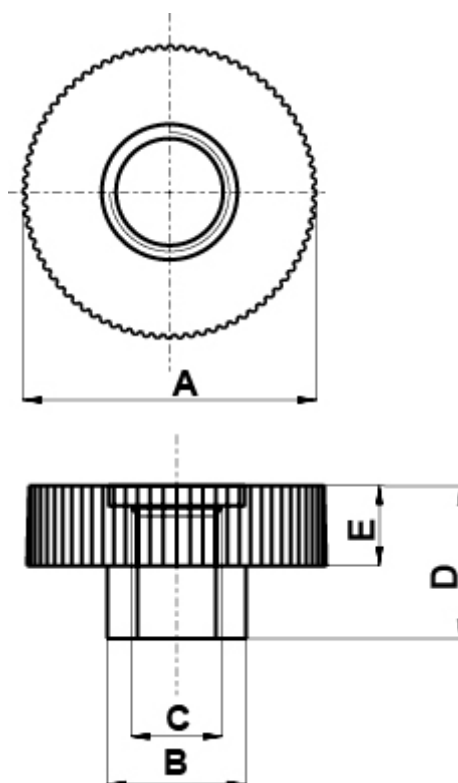

Codigo	A	B	C	D	E	DIN	Conf./piezas
10382AA00	12,0	7,0	M 3	7,0	3,5	DIN 466	1.000

Codigo	A	B	C	D	E	DIN	Conf./piezas
10390AA00	12,0	8,5	M 3	5,0	3,5	DIN 467	1.000
10397AA00	20,0	10,0	M 4	7,5	6,0	DIN 467	1.000
10392AA00	16,0	10,0	M 4	6,0	4,5	DIN 467	1.000
10383AA00	12,0	7,0	M 4	7,0	3,5	DIN 466	1.000
10391AA00	14,0	8,5	M 4	5,0	3,5	DIN 467	1.000
10385AA00	16,0	9,5	M 4	8,0	4,5	DIN 466	1.000
10388AA00	20,0	13,0	M 5	11,0	6,0	DIN 466	1.000
10386AA00	16,0	9,5	M 5	8,0	4,5	DIN 466	1.000
10393AA00	16,0	10,0	M 5	6,0	4,5	DIN 467	1.000
10395AA00	19,0	10,0	M 5	7,5	6,0	DIN 467	1.000
10384AA00	14,0	8,8	M 5	7,0	3,5	DIN 466	1.000
10389AA00	20,0	13,0	M 6	11,0	6,0	DIN 466	1.000
10387AA00	16,0	9,5	M 6	8,0	4,5	DIN 466	1.000
10394AA00	16,0	10,0	M 6	6,0	4,5	DIN 467	1.000
10396AA00	19,0	10,0	M 6	7,5	6,0	DIN 467	1.000
10398AA00	24,0	13,0	M 8	7,5	6,0	DIN 467	1.000