


CALZE DI TERRA FLESSIBILI



Descrizione tecnica

Materiale: Rame stagnato

Tutte le quote sono in mm

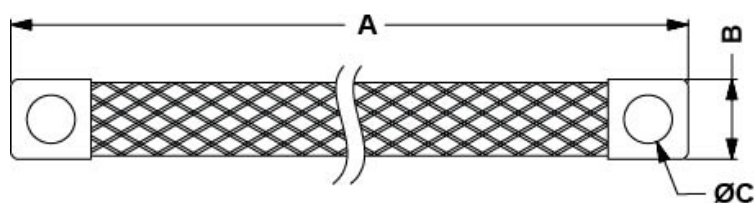

Codice	Sezione mm ²	A	B	C	Conf./pezzi
16379ZG91	100,0	6,0	10,0	10	
16420ZG91	150,0	6,0	10,0	10	
16421ZG91	200,0	6,0	10,0	10	
16422ZG91	250,0	6,0	10,0	10	
16423ZG91	300,0	6,0	10,0	10	
16424ZG91	400,0	6,0	10,0	10	
16425ZG91	500,0	6,0	10,0	10	
16426ZG91	100,0	6,0	15,0	10	
16427ZG91	100,0	8,0	15,0	10	
16428ZG91	150,0	8,0	15,0	10	
16429ZG91	200,0	6,0	15,0	10	
16430ZG91	200,0	8,0	15,0	10	
16431ZG91	250,0	6,0	15,0	10	

Codice	Sezione mm2	A	B	C	Conf./pezzi
16432ZG91	300,0	6,0	15,0	10	
16433ZG91	300,0	8,0	15,0	10	
16434ZG91	400,0	6,0	15,0	10	
16435ZG91	400,0	8,0	15,0	10	
16436ZG91	500,0	6,0	15,0	10	
16437ZG91	100,0	6,0	19,0	10	
16438ZG91	100,0	8,0	19,0	10	
16439ZG91	150,0	6,0	19,0	10	
16440ZG91	150,0	8,0	19,0	10	
16441ZG91	200,0	6,0	19,0	10	
16442ZG91	200,0	8,0	19,0	10	
16443ZG91	250,0	8,0	19,0	10	
16444ZG91	300,0	6,0	19,0	10	
16445ZG91	300,0	8,0	19,0	10	
16446ZG91	350,0	8,0	19,0	10	
16447ZG91	400,0	8,0	19,0	10	
16448ZG91	500,0	8,0	19,0	10	
16449ZG91	600,0	8,0	19,0	10	
16450ZG91	100,0	10,0	20,0	10	
16451ZG91	150,0	10,0	20,0	10	
16452ZG91	200,0	8,0	20,0	10	
16453ZG91	200,0	10,0	20,0	10	
16454ZG91	250,0	8,0	20,0	10	
16455ZG91	300,0	8,0	20,0	10	
16456ZG91	300,0	10,0	20,0	10	
16457ZG91	350,0	10,0	20,0	10	
16458ZG91	400,0	8,0	20,0	10	
16459ZG91	500,0	8,0	20,0	10	
16460ZG91	600,0	8,0	20,0	10	