

# CONTRODADI IN OTTONE PASSO METRICO EMC




## Descrizione tecnica

**Materiale:** Ottone nichelato

**Temperatura d'esercizio:** -60°C ~ +200°C

Metrico a norma EN 60423

Tutte le quote sono in mm

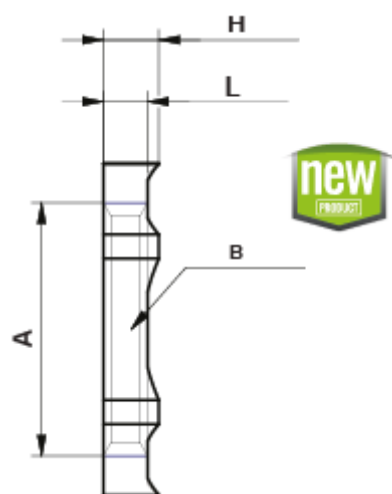

| Codice    | A       | B    | H   | L   | Conf./pezzi |
|-----------|---------|------|-----|-----|-------------|
| 18501MA92 | M16x1,5 | 19,0 | 3,5 | 2,8 | 100         |
| 17943MA92 | M20x1,5 | 24,0 | 3,7 | 3,0 | 100         |
| 18502MA92 | M25x1,5 | 30,0 | 4,2 | 3,5 | 100         |
| 18582MA92 | M32x1,5 | 36,0 | 4,7 | 4,0 | 100         |
| 18583MA92 | M40x1,5 | 46,0 | 5,7 | 5,0 | 50          |
| 18584MA92 | M50x1,5 | 60,0 | 5,7 | 5,0 | 50          |
| 18585MA92 | M63x1,5 | 70,0 | 6,7 | 6,0 | 50          |