

## DADO ZIGRINATO AD INSERIMENTO RAPIDO



### Descrizione tecnica


**Materiale:** PA 6.6

**Colore :** nero

**Temperatura esercizio:**

-30° C ~ + max. 100° C

Tutte le quote sono in mm.

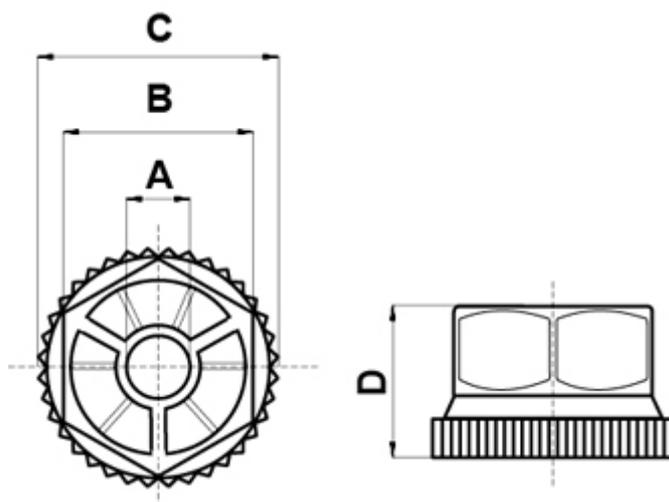

Codice	A	B	C	D	Conf./pezzi
10438AA01	M 3	6,9	8,1	4,2	1.000
10439AA01	M 4	7,9	9,7	4,8	1.000
10440AA01	M 5	9,9	12,1	5,8	1.000
10441AA01	M 6	12,7	15,0	6,9	1.000
18306AA01	M 8	17,0	20,0	8,6	1.000
18307AA01	M 10	19,0	21,9	10,5	1.000