

DISTANZIATORI A DOPPIO INNESTO RAPIDO FORO DI Ø 3,2 – Ø 5,0



Descrizione tecnica


Materiale: PA 6.6

Colore: nero

Autoestinguenza: HB (UL 94)

Temperatura esercizio: -30°C ~ +130°C

Tutte le quote sono in mm

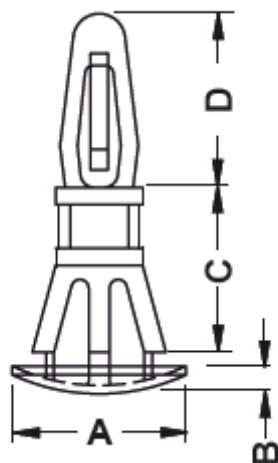

Codice	A	B	C	D	Foro superiore	Spessore sup.	Foro inferiore	Spessore inf.	Conf./pezzi
10001AA0104.0	9,0	1,7	4,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0105.0	9,0	1,7	5,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0106.0	9,0	1,7	6,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0107.0	9,0	1,7	7,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0108.0	9,0	1,7	8,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500

Codice	A	B	C	D	Foro superiore	Spessore sup.	Foro inferiore	Spessore inf.	Conf./pezzi
10001AA0109.0	9,0	1,7	9,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0110.0	9,0	1,7	10,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0111.0	9,0	1,7	11,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0112.0	9,0	1,7	12,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0113.0	9,0	1,7	13,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0114.0	9,0	1,7	14,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0115.0	9,0	1,7	15,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0116.0	9,0	1,7	16,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0117.0	9,0	1,7	17,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0118.0	9,0	1,7	18,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0119.0	9,0	1,7	19,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0120.0	9,0	1,7	20,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0121.0	9,0	1,7	21,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0122.0	9,0	1,7	22,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0123.0	9,0	1,7	23,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0124.0	9,0	1,7	24,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0125.0	9,0	1,7	25,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0126.0	9,0	1,7	26,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0127.0	9,0	1,7	27,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0128.0	9,0	1,7	28,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0129.0	9,0	1,7	29,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0130.0	9,0	1,7	30,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0131.0	9,0	1,7	31,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0132.0	9,0	1,7	32,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0133.0	9,0	1,7	33,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0134.0	9,0	1,7	34,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0135.0	9,0	1,7	35,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0136.0	9,0	1,7	36,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0137.0	9,0	1,7	37,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0138.0	9,0	1,7	38,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0139.0	9,0	1,7	39,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500

Codice	A	B	C	D	Foro superiore	Spessore sup.	Foro inferiore	Spessore inf.	Conf./pezzi
10001AA0140.0	9,0	1,7	40,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0141.0	9,0	1,7	41,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0142.0	9,0	1,7	42,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0143.0	9,0	1,7	43,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0144.0	9,0	1,7	44,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0145.0	9,0	1,7	45,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0146.0	9,0	1,7	46,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0147.0	9,0	1,7	47,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0148.0	9,0	1,7	48,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0149.0	9,0	1,7	49,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0150.0	9,0	1,7	50,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0151.0	9,0	1,7	51,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0152.0	9,0	1,7	52,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0153.0	9,0	1,7	53,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0154.0	9,0	1,7	54,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0155.0	9,0	1,7	55,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0156.0	9,0	1,7	56,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0157.0	9,0	1,7	57,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0158.0	9,0	1,7	58,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0159.0	9,0	1,7	59,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0160.0	9,0	1,7	60,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0161.0	9,0	1,7	61,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0162.0	9,0	1,7	62,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0163.0	9,0	1,7	63,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0164.0	9,0	1,7	64,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500
10001AA0165.0	9,0	1,7	65,0	9,8	Ø 3,2	1,5	Ø 5,0	1,5	500