

DISTANZIATORI CILINDRICI DIAM. INT. 3,4/ DIAM. EST. 5,0



Descrizione tecnica

Materiale: PA 6 , 25%GV

Autoestinguenza: HB (UL 94)

Colore: nero

Temperatura esercizio: -35°C ~ +100°C


Alternativa:

Materiale: polistirene

Autoestinguenza: HB (UL 94)

Colore: Bianco

Temperatura esercizio: -40°C ~ +70°C

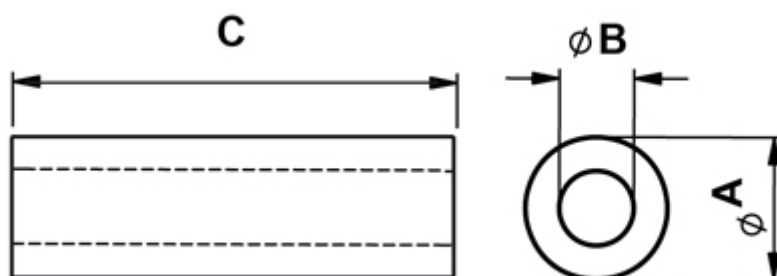

Codice	A	B	C	Conf./pezzi
10092BB0102.0	5,0	3,4	2,0	500
10092BB0103.0	5,0	3,4	3,0	500

Codice	A	B	C	Conf./pezzi
10092BB0104.0	5,0	3,4	4,0	500
10092BB0105.0	5,0	3,4	5,0	500
10092BB0106.0	5,0	3,4	6,0	500
10092BB0107.0	5,0	3,4	7,0	500
10092BB0108.0	5,0	3,4	8,0	500
10092BB0109.0	5,0	3,4	9,0	500
10092BB0110.0	5,0	3,4	10,0	500
10092BB0111.0	5,0	3,4	11,0	500
10092BB0112.0	5,0	3,4	12,0	500
10092BB0113.0	5,0	3,4	13,0	500
10092BB0114.0	5,0	3,4	14,0	500
10092BB0115.0	5,0	3,4	15,0	500
10092BB0116.0	5,0	3,4	16,0	500
10092BB0117.0	5,0	3,4	17,0	500
10092BB0118.0	5,0	3,4	18,0	500
10092BB0119.0	5,0	3,4	19,0	500
10092BB0120.0	5,0	3,4	20,0	500
10092BB0121.0	5,0	3,4	21,0	500
10092BB0122.0	5,0	3,4	22,0	500
10092BB0123.0	5,0	3,4	23,0	500
10092BB0124.0	5,0	3,4	24,0	500
10092BB0125.0	5,0	3,4	25,0	500
10092BB0126.0	5,0	3,4	26,0	500
10092BB0127.0	5,0	3,4	27,0	500
10092BB0128.0	5,0	3,4	28,0	500
10092BB0129.0	5,0	3,4	29,0	500
10092BB0130.0	5,0	3,4	30,0	500
10092BB0131.0	5,0	3,4	31,0	500
10092BB0132.0	5,0	3,4	32,0	500
10092BB0133.0	5,0	3,4	33,0	500
10092BB0134.0	5,0	3,4	34,0	500

Codice	A	B	C	Conf./pezzi
10092BB0135.0	5,0	3,4	35,0	500
10092BB0136.0	5,0	3,4	36,0	500
10092BB0137.0	5,0	3,4	37,0	500
10092BB0138.0	5,0	3,4	38,0	500
10092BB0139.0	5,0	3,4	39,0	500
10092BB0140.0	5,0	3,4	40,0	500
10092BB0141.0	5,0	3,4	41,0	500
10092BB0142.0	5,0	3,4	42,0	500
10092BB0143.0	5,0	3,4	43,0	500
10092BB0144.0	5,0	3,4	44,0	500
10092BB0145.0	5,0	3,4	45,0	500