

DISTANZIATORI CILINDRICI DIAM. INT. 3,4/ DIAM. EST. 5,5



Descrizione tecnica

Materiale: PA 6 , 25%GV

Autoestinguenza: HB (UL 94)

Colore: nero

Temperatura esercizio: -35°C ~ +100°C


Alternativa:

Materiale: polistirene

Autoestinguenza: HB (UL 94)

Colore: Bianco

Temperatura esercizio: -40°C ~ +70°C

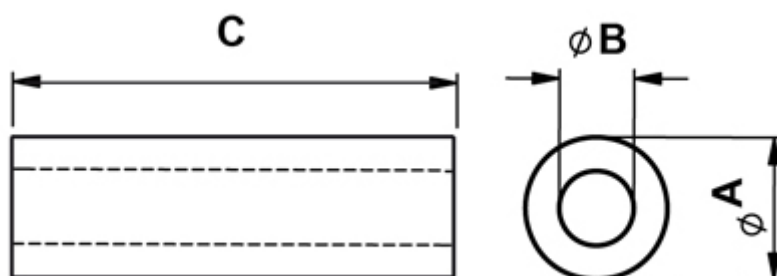

Codice	A	B	C	Conf./pezzi
10093BB0102.0	5,5	3,4	2,0	500
10093BB0103.0	5,5	3,4	3,0	500

Codice	A	B	C	Conf./pezzi
10093BB0104.0	5,5	3,4	4,0	500
10093BB0105.0	5,5	3,4	5,0	500
10093BB0106.0	5,5	3,4	6,0	500
10093BB0107.0	5,5	3,4	7,0	500
10093BB0108.0	5,5	3,4	8,0	500
10093BB0109.0	5,5	3,4	9,0	500
10093BB0110.0	5,5	3,4	10,0	500
10093BB0111.0	5,5	3,4	11,0	500
10093BB0112.0	5,5	3,4	12,0	500
10093BB0113.0	5,5	3,4	13,0	500
10093BB0114.0	5,5	3,4	14,0	500
10093BB0115.0	5,5	3,4	15,0	500
10093BB0116.0	5,5	3,4	16,0	500
10093BB0117.0	5,5	3,4	17,0	500
10093BB0118.0	5,5	3,4	18,0	500
10093BB0119.0	5,5	3,4	19,0	500
10093BB0120.0	5,5	3,4	20,0	500
10093BB0121.0	5,5	3,4	21,0	500
10093BB0122.0	5,5	3,4	22,0	500
10093BB0123.0	5,5	3,4	23,0	500
10093BB0124.0	5,5	3,4	24,0	500
10093BB0125.0	5,5	3,4	25,0	500
10093BB0126.0	5,5	3,4	26,0	500
10093BB0127.0	5,5	3,4	27,0	500
10093BB0128.0	5,5	3,4	28,0	500
10093BB0129.0	5,5	3,4	29,0	500
10093BB0130.0	5,5	3,4	30,0	500
10093BB0140.0	5,5	3,4	40,0	500
10093BB0141.0	5,5	3,4	41,0	500
10093BB0142.0	5,5	3,4	42,0	500
10093BB0143.0	5,5	3,4	43,0	500

Codice	A	B	C	Conf./pezzi
10093BB0144.0	5,5	3,4	44,0	500
10093BB0145.0	5,5	3,4	45,0	500
10093BB0146.0	5,5	3,4	46,0	500
10093BB0147.0	5,5	3,4	47,0	500
10093BB0148.0	5,5	3,4	48,0	500
10093BB0149.0	5,5	3,4	49,0	500
10093BB0150.0	5,5	3,4	50,0	500
10093BB0151.0	5,5	3,4	51,0	500
10093BB0152.0	5,5	3,4	52,0	500
10093BB0153.0	5,5	3,4	53,0	500
10093BB0154.0	5,5	3,4	54,0	500
10093BB0155.0	5,5	3,4	55,0	500
10093BB0156.0	5,5	3,4	56,0	500
10093BB0157.0	5,5	3,4	57,0	500
10093BB0158.0	5,5	3,4	58,0	500
10093BB0159.0	5,5	3,4	59,0	500
10093BB0160.0	5,5	3,4	60,0	500