

DISTANZIATORI CILINDRICI DIAM. INT. 3,4/ DIAM. EST. 6,0



Descrizione tecnica

Materiale: PA 6 , 25%GV

Autoestinguenza: HB (UL 94)

Colore: nero

Temperatura esercizio: -35°C ~ +100°C


Alternativa:

Materiale: polistirene

Autoestinguenza: HB (UL 94)

Colore: Bianco

Temperatura esercizio: -40°C ~ +70°C

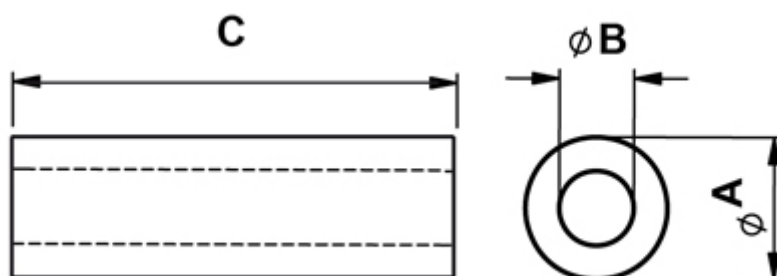

Codice	A	B	C	Conf./pezzi
10097BB0102.0	6,0	3,4	2,0	500
10097BB0103.0	6,0	3,4	3,0	500

Codice	A	B	C	Conf./pezzi
10097BB0104.0	6,0	3,4	4,0	500
10097BB0105.0	6,0	3,4	5,0	500
10097BB0106.0	6,0	3,4	6,0	500
10097BB0107.0	6,0	3,4	7,0	500
10097BB0108.0	6,0	3,4	8,0	500
10097BB0109.0	6,0	3,4	9,0	500
10097BB0110.0	6,0	3,4	10,0	500
10097BB0111.0	6,0	3,4	11,0	500
10097BB0112.0	6,0	3,4	12,0	500
10097BB0113.0	6,0	3,4	13,0	500
10097BB0114.0	6,0	3,4	14,0	500
10097BB0115.0	6,0	3,4	15,0	500
10097BB0116.0	6,0	3,4	16,0	500
10097BB0117.0	6,0	3,4	17,0	500
10097BB0118.0	6,0	3,4	18,0	500
10097BB0119.0	6,0	3,4	19,0	500
10097BB0120.0	6,0	3,4	20,0	500
10097BB0121.0	6,0	3,4	21,0	500
10097BB0122.0	6,0	3,4	22,0	500
10097BB0123.0	6,0	3,4	23,0	500
10097BB0124.0	6,0	3,4	24,0	500
10097BB0125.0	6,0	3,4	25,0	500
10097BB0126.0	6,0	3,4	26,0	500
10097BB0127.0	6,0	3,4	27,0	500
10097BB0128.0	6,0	3,4	28,0	500
10097BB0129.0	6,0	3,4	29,0	500
10097BB0130.0	6,0	3,4	30,0	500
10097BB0131.0	6,0	3,4	31,0	500
10097BB0132.0	6,0	3,4	32,0	500
10097BB0133.0	6,0	3,4	33,0	500
10097BB0134.0	6,0	3,4	34,0	500

Codice	A	B	C	Conf./pezzi
10097BB0135.0	6,0	3,4	35,0	500
10097BB0136.0	6,0	3,4	36,0	500
10097BB0137.0	6,0	3,4	37,0	500
10097BB0138.0	6,0	3,4	38,0	500
10097BB0139.0	6,0	3,4	39,0	500
10097BB0140.0	6,0	3,4	40,0	500
10097BB0141.0	6,0	3,4	41,0	500
10097BB0142.0	6,0	3,4	42,0	500
10097BB0143.0	6,0	3,4	43,0	500
10097BB0144.0	6,0	3,4	44,0	500
10097BB0145.0	6,0	3,4	45,0	500
10097BB0146.0	6,0	3,4	46,0	500
10097BB0147.0	6,0	3,4	47,0	500
10097BB0148.0	6,0	3,4	48,0	500
10097BB0149.0	6,0	3,4	49,0	500
10097BB0150.0	6,0	3,4	50,0	500
10097BB0151.0	6,0	3,4	51,0	500
10097BB0152.0	6,0	3,4	52,0	500
10097BB0153.0	6,0	3,4	53,0	500
10097BB0154.0	6,0	3,4	54,0	500
10097BB0155.0	6,0	3,4	55,0	500
10097BB0156.0	6,0	3,4	56,0	500
10097BB0157.0	6,0	3,4	57,0	500
10097BB0158.0	6,0	3,4	58,0	500
10097BB0159.0	6,0	3,4	59,0	500
10097BB0160.0	6,0	3,4	60,0	500