

DISTANZIATORI CILINDRICI DIAM. INT. 4,1/ DIAM. EST. 6,0



Descrizione tecnica

Materiale: PA 6 , 25%GV

Autoestinguenza: HB (UL 94)

Colore: nero

Temperatura esercizio: -35°C ~ +100°C


Alternativa:

Materiale: polistirene

Autoestinguenza: HB (UL 94)

Colore: Bianco

Temperatura esercizio: -40°C ~ +70°C

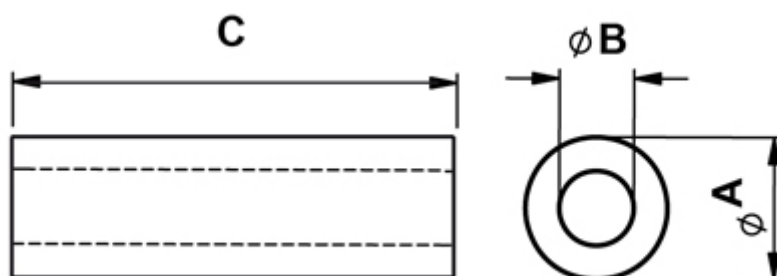

Codice	A	B	C	Conf./pezzi
10098BB0102.0	6,0	4,1	2,0	500
10098BB0103.0	6,0	4,1	3,0	500

Codice	A	B	C	Conf./pezzi
10098BB0104.0	6,0	4,1	4,0	500
10098BB0105.0	6,0	4,1	5,0	500
10098BB0106.0	6,0	4,1	6,0	500
10098BB0107.0	6,0	4,1	7,0	500
10098BB0108.0	6,0	4,1	8,0	500
10098BB0109.0	6,0	4,1	9,0	500
10098BB0110.0	6,0	4,1	10,0	500
10098BB0111.0	6,0	4,1	11,0	500
10098BB0112.0	6,0	4,1	12,0	500
10098BB0113.0	6,0	4,1	13,0	500
10098BB0114.0	6,0	4,1	14,0	500
10098BB0115.0	6,0	4,1	15,0	500
10098BB0116.0	6,0	4,1	16,0	500
10098BB0117.0	6,0	4,1	17,0	500
10098BB0118.0	6,0	4,1	18,0	500
10098BB0119.0	6,0	4,1	19,0	500
10098BB0120.0	6,0	4,1	20,0	500
10098BB0121.0	6,0	4,1	21,0	500
10098BB0122.0	6,0	4,1	22,0	500
10098BB0123.0	6,0	4,1	23,0	500
10098BB0124.0	6,0	4,1	24,0	500
10098BB0125.0	6,0	4,1	25,0	500
10098BB0126.0	6,0	4,1	26,0	500
10098BB0127.0	6,0	4,1	27,0	500
10098BB0128.0	6,0	4,1	28,0	500
10098BB0129.0	6,0	4,1	29,0	500
10098BB0130.0	6,0	4,1	30,0	500
10098BB0131.0	6,0	4,1	31,0	500
10098BB0140.0	6,0	4,1	40,0	500
10098BB0141.0	6,0	4,1	41,0	500
10098BB0142.0	6,0	4,1	42,0	500

Codice	A	B	C	Conf./pezzi
10098BB0143.0	6,0	4,1	43,0	500
10098BB0144.0	6,0	4,1	44,0	500
10098BB0145.0	6,0	4,1	45,0	500
10098BB0146.0	6,0	4,1	46,0	500
10098BB0147.0	6,0	4,1	47,0	500
10098BB0148.0	6,0	4,1	48,0	500
10098BB0149.0	6,0	4,1	49,0	500
10098BB0150.0	6,0	4,1	50,0	500
10098BB0151.0	6,0	4,1	51,0	500
10098BB0152.0	6,0	4,1	52,0	500
10098BB0153.0	6,0	4,1	53,0	500
10098BB0154.0	6,0	4,1	54,0	500