

DISTANZIATORI CILINDRICI DIAM. INT. 9,5/DIAM. EST. 14,0



Descrizione tecnica

Materiale: PA 6 , 25%GV

Autoestinguenza: HB (UL 94)


Colore: nero **Temperatura esercizio:** -35°C ~ +110°C

Alternativa:

Materiale: polistirene

Autoestinguenza: HB (UL 94) **Colore:** Bianco

Temperatura esercizio: -40°C ~ +70°C

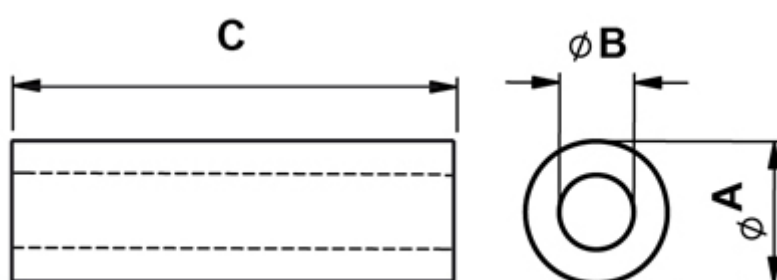

Codice	A	B	C	Conf./pezzi
10129BB0102.0	14,0	9,5	2,0	500
10129BB0103.0	14,0	9,5	3,0	500
10129BB0104.0	14,0	9,5	4,0	500
10129BB0105.0	14,0	9,5	5,0	500
10129BB0106.0	14,0	9,5	6,0	500

Codice	A	B	C	Conf./pezzi
10129BB0107.0	14,0	9,5	7,0	500
10129BB0108.0	14,0	9,5	8,0	500
10129BB0109.0	14,0	9,5	9,0	500
10129BB0110.0	14,0	9,5	10,0	500
10129BB0111.0	14,0	9,5	11,0	500
10129BB0112.0	14,0	9,5	12,0	500
10129BB0113.0	14,0	9,5	13,0	500
10129BB0114.0	14,0	9,5	14,0	500
10129BB0115.0	14,0	9,5	15,0	500
10129BB0116.0	14,0	9,5	16,0	500
10129BB0117.0	14,0	9,5	17,0	500
10129BB0118.0	14,0	9,5	18,0	500
10129BB0119.0	14,0	9,5	19,0	500
10129BB0120.0	14,0	9,5	20,0	500
10129BB0121.0	14,0	9,5	21,0	500
10129BB0122.0	14,0	9,5	22,0	500
10129BB0123.0	14,0	9,5	23,0	500
10129BB0124.0	14,0	9,5	24,0	500
10129BB0125.0	14,0	9,5	25,0	500
10129BB0126.0	14,0	9,5	26,0	500
10129BB0127.0	14,0	9,5	27,0	500
10129BB0128.0	14,0	9,5	28,0	500
10129BB0129.0	14,0	9,5	29,0	500
10129BB0130.0	14,0	9,5	30,0	500
10129BB0131.0	14,0	9,5	31,0	500
10129BB0132.0	14,0	9,5	32,0	500
10129BB0133.0	14,0	9,5	33,0	500
10129BB0134.0	14,0	9,5	34,0	500
10129BB0135.0	14,0	9,5	35,0	500
10129BB0136.0	14,0	9,5	36,0	500
10129BB0137.0	14,0	9,5	37,0	500

Codice	A	B	C	Conf./pezzi
10129BB0138.0	14,0	9,5	38,0	500
10129BB0139.0	14,0	9,5	39,0	500
10129BB0140.0	14,0	9,5	40,0	500
10129BB0141.0	14,0	9,5	41,0	500
10129BB0142.0	14,0	9,5	42,0	500
10129BB0143.0	14,0	9,5	43,0	500
10129BB0144.0	14,0	9,5	44,0	500
10129BB0145.0	14,0	9,5	45,0	500
10129BB0146.0	14,0	9,5	46,0	500
10129BB0147.0	14,0	9,5	47,0	500
10129BB0148.0	14,0	9,5	48,0	500
10129BB0149.0	14,0	9,5	49,0	500
10129BB0150.0	14,0	9,5	50,0	500