

DISTANZIATORI ISOLANTI M/F



Descrizione tecnica

Materiale: Polistirolo

Inserto filettato: Acciaio zincato


Colore: grigio

Autoestinguenza: HB (UL 94)

Temperatura d'esercizio: -15°C ~ + 90°C

Rigidità dielettrica: 50kV

Tutte le dimensioni sono in mm.

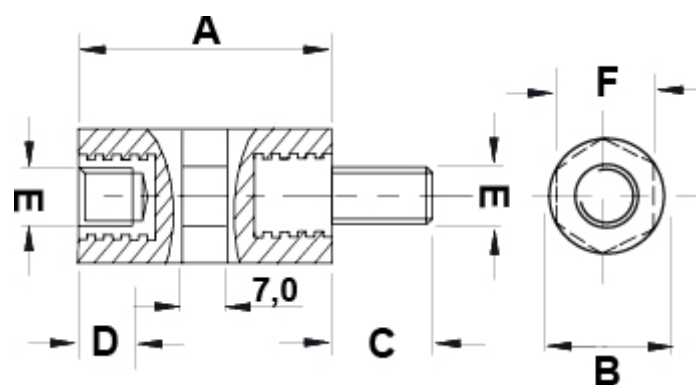

Codice	A	B	C	D	E	F	Type	Conf./pezzi
10481DA1115.0	15,0	7,0	7,0	7,0	M3	6,0	1	100
10481DA1120.0	20,0	7,0	7,0	7,0	M3	6,0	1	100
10481DA1125.0	25,0	7,0	7,0	7,0	M3	6,0	1	100
10481DA1130.0	30,0	7,0	7,0	7,0	M3	6,0	1	100
10481DA1140.0	40,0	7,0	7,0	7,0	M3	6,0	1	100
10484DA1115.0	15,0	10,0	7,0	7,0	M4	9,0	1	100

Codice	A	B	C	D	E	F	Type	Conf./pezzi
10484DA1120.0	20,0	10,0	7,0	7,0	M4	9,0	1	100
10484DA1125.0	25,0	10,0	7,0	7,0	M4	9,0	1	100
10484DA1130.0	30,0	10,0	7,0	7,0	M4	9,0	1	100
10484DA1140.0	40,0	10,0	7,0	7,0	M4	9,0	1	100
10484DA1145.0	45,0	10,0	7,0	7,0	M4	9,0	1	100
10484DA1150.0	50,0	10,0	7,0	7,0	M4	9,0	1	100