

DISTANZIATORI M/F M3 ESAGONO 5,5



Descrizione tecnica


Materiale: PA 6.6

Colore: nero

Autoestinguenza: HB (UL 94)

Temperatura esercizio: -30°C ~ +130°C

Tutte le quote sono in mm

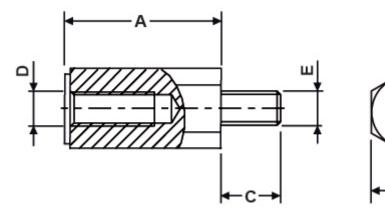

Codice	А	В	С	D	E	Conf./pezzi
6921AA0105.0	5,0	5,5	8,0	М3	М3	500
6921AA0106.0	6,0	5,5	8,0	М3	М3	500
6921AA0107.0	7,0	5,5	8,0	М3	М3	500
6921AA0108.0	8,0	5,5	8,0	М3	М3	500
6921AA0109.0	9,0	5,5	8,0	М3	М3	500
6921AA0110.0	10,0	5,5	8,0	М3	М3	500
6921AA0111.0	11,0	5,5	8,0	М3	М3	500



Codice	A	В	С	D	E	Conf./pezzi
6921AA0112.0	12,0	5,5	8,0	М3	М3	500
6921AA0113.0	13,0	5,5	8,0	М3	М3	500
6921AA0114.0	14,0	5,5	8,0	М3	М3	500
6921AA0115.0	15,0	5,5	8,0	М3	М3	500
6921AA0116.0	16,0	5,5	8,0	М3	М3	500
6921AA0117.0	17,0	5,5	8,0	М3	М3	500
6921AA0118.0	18,0	5,5	8,0	М3	М3	500
6921AA0119.0	19,0	5,5	8,0	М3	М3	500
6921AA0120.0	20,0	5,5	8,0	М3	М3	500
6921AA0121.0	21,0	5,5	8,0	М3	М3	500
6921AA0122.0	22,0	5,5	8,0	М3	М3	500
6921AA0123.0	23,0	5,5	8,0	М3	М3	500
6921AA0124.0	24,0	5,5	8,0	М3	М3	500
6921AA0125.0	25,0	5,5	8,0	М3	М3	500
6921AA0126.0	26,0	5,5	8,0	М3	М3	500
6921AA0127.0	27,0	5,5	8,0	М3	М3	500
6921AA0128.0	28,0	5,5	8,0	М3	М3	500
6921AA0129.0	29,0	5,5	8,0	М3	М3	500
6921AA0130.0	30,0	5,5	8,0	М3	М3	500
6921AA0131.0	31,0	5,5	8,0	М3	М3	500
6921AA0132.0	32,0	5,5	8,0	М3	М3	500
6921AA0133.0	33,0	5,5	8,0	М3	М3	500
6921AA0134.0	34,0	5,5	8,0	М3	М3	500
6921AA0135.0	35,0	5,5	8,0	М3	М3	500
6921AA0136.0	36,0	5,5	8,0	М3	М3	500
6921AA0137.0	37,0	5,5	8,0	М3	М3	500
6921AA0138.0	38,0	5,5	8,0	М3	М3	500
6921AA0139.0	39,0	5,5	8,0	М3	М3	500
6921AA0140.0	40,0	5,5	8,0	М3	М3	500
6921AA0141.0	41,0	5,5	8,0	МЗ	М3	500
6921AA0142.0	42,0	5,5	8,0	М3	М3	500



Codice	Α	В	С	D	E	Conf./pezzi
6921AA0143.0	43,0	5,5	8,0	М3	М3	500
6921AA0144.0	44,0	5,5	8,0	М3	М3	500
6921AA0145.0	45,0	5,5	8,0	М3	М3	500
6921AA0146.0	46,0	5,5	8,0	М3	М3	500
6921AA0147.0	47,0	5,5	8,0	М3	М3	500
6921AA0148.0	48,0	5,5	8,0	M3	М3	500
6921AA0149.0	49,0	5,5	8,0	М3	М3	500
6921AA0150.0	50,0	5,5	8,0	M3	М3	500
6921AA0151.0	51,0	5,5	8,0	М3	М3	500
6921AA0152.0	52,0	5,5	8,0	М3	М3	500
6921AA0153.0	53,0	5,5	8,0	М3	М3	500
6921AA0154.0	54,0	5,5	8,0	М3	М3	500
6921AA0155.0	55,0	5,5	8,0	М3	М3	500
6921AA0156.0	56,0	5,5	8,0	М3	М3	500
6921AA0157.0	57,0	5,5	8,0	М3	М3	500
6921AA0158.0	58,0	5,5	8,0	М3	М3	500
6921AA0159.0	59,0	5,5	8,0	М3	М3	500
6921AA0160.0	60,0	5,5	8,0	М3	М3	500
6921AA0161.0	61,0	5,5	8,0	М3	М3	500