

FASCETTE CON FORO PER VITE



Descrizione tecnica


Materiale: PA 6.6

Colore: naturale

Autoestinguenza: V2 (UL 94)

Temperatura esercizio: -35°C ~ +85°C

Tutte le quote sono in mm.

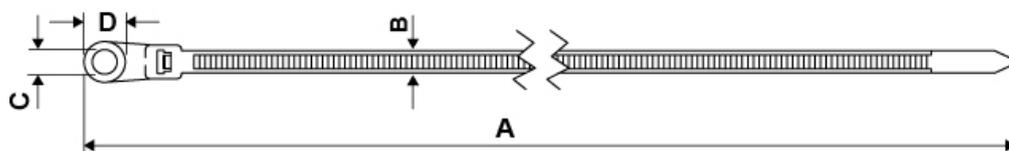

Codice	A	B	C	D	Max cavo	Carico Min. tenuta (kg)	Conf./pezzi
2436AA00	150,0	3,6	4,8	8,0	32,0	18,2	1.000
2437AA00	200,0	4,8	5,5	9,6	50,0	22,2	1.000
2438AA00	215,0	7,6	5,7	11,5	50,0	54,4	100
2439AA00	375,0	7,6	6,3	11,5	98,0	54,4	100
4771AA00	110,0	2,5	3,2	6,2	22,0	8,1	1.000
4772AA00	310,0	4,8	5,5	9,8	76,0	22,2	1.000