


FERMACAVI CON DOPPIA SEDE

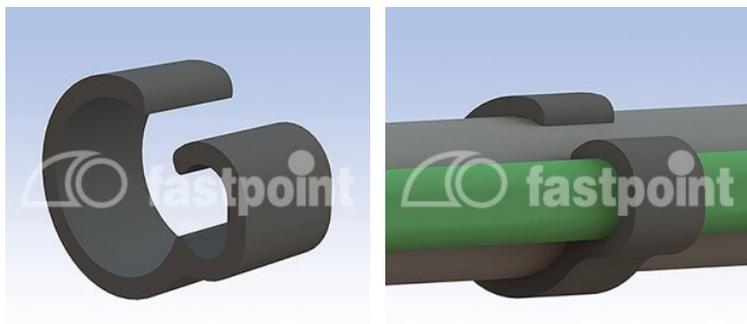

Descrizione tecnica


Materiale: Vedi tabella

Colore: naturale o nero

Autoestinguenza: V2 (UL 94)

Temperatura esercizio: -35°C ~ +85°C

Tutte le quote sono in mm.

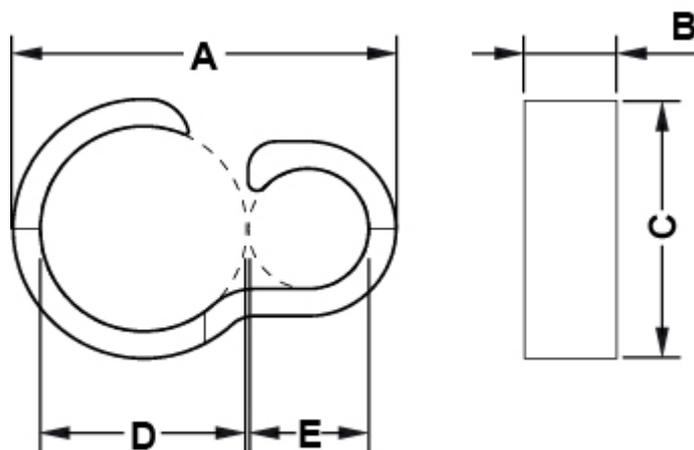

Codice	A	B	C	D	E	Materiale	Conf./pezzi
1081AA01	19,0	8,0	11,5	9,0	7,0	PA 6.6	1.000
1082AA01	22,5	8,0	15,0	12,0	7,0	PA 6.6	1.000
1083AA01	25,5	8,0	18,0	15,0	7,0	PA 6.6	1.000
3287AB01	13,5	8,0	9,5	7,0	6X4	PA 6.6 20% CV	1.000
3288AB01	15,5	8,0	11,5	9,0	6X4	PA 6.6 20% CV	1.000
3289AB01	19,0	9,0	15,0	12,0	6X4	PA 6.6 20% CV	1.000

Codice	A	B	C	D	E	Materiale	Conf./pezzi
3290BB01	22,0	9,0	18,2	15,0	6X4	PA 6.6 25% CV	1.000
3291BB01	25,0	10,0	21,6	18,0	6X4	PA 6.6 25% CV	1.000