


FERMACAVI CON FISSAGGIO A VITE

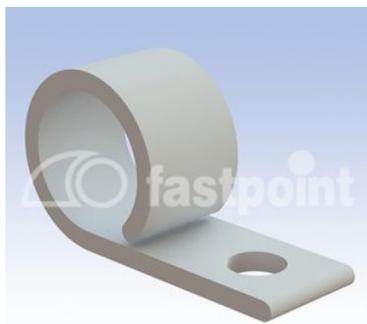

Descrizione tecnica

Materiale: PA 6.6

Colore: naturale


Autoestinguenza: V2 (UL 94)

Temperatura esercizio:

-35°C ~ +85°C

F = Diametro max. cavo chiuso

Tutte le quote sono in mm.

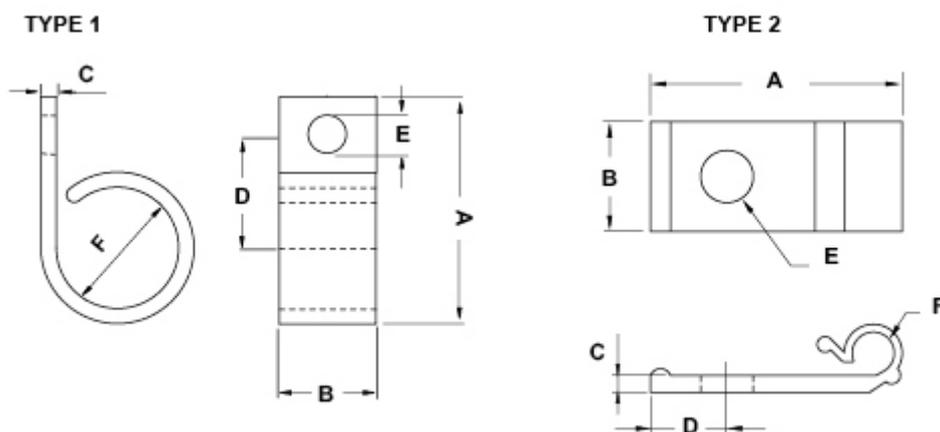

Codice	A	B	C	D	E	F	Type	Conf./pezzi
12262AA00	53,5	12,6	2,5	-	Ø 5,0	Ø 36,9	1	100
18308AA00	32,54	12,7	2,0	Ø 5,18	Ø 19,1	1	500	
5498AA00	20,0	10,2	1,3	9,0	Ø 5,2	Ø 9,2	1	1.000
5499AA00	30,0	12,7	2,0	17,0	Ø 5,0	Ø 16,0	1	1.000
6397AA00	29,5	10,2	1,8	12,5	Ø 5,0	Ø 12,7	1	500
6414AA00	21,2	10,3	1,5	10,3	Ø 5,2	Ø 6,0	1	500

Codice	A	B	C	D	E	F	Type	Conf./pezzi
6517AA00	19,1	8,4	1,3	5,8	Ø 4,0	Ø 3,2	2	1.000
6518AA00	39,8	12,6	2,2	-	Ø 5,15	Ø 26,0	1	250