

LACCI AUTOADESIVI



Descrizione tecnica

Materiale: PA 6.6


Colore: naturale

Autoestinguenza: V2 (UL 94)

Spessore Adesivo: 0,8mm

Temp. esercizio adesivo standard: -20°C ~ +70°

Tutte le quote sono in mm.

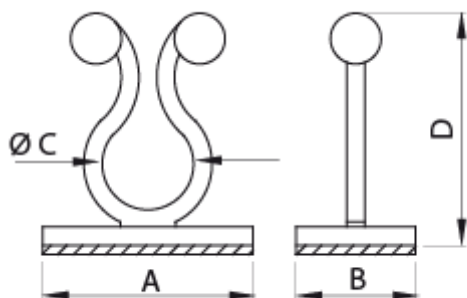

Codice	A	B	C	D	Conf./pezzi
6275AA00AS	25,0	12,7	Ø 8,2	27,9	1.000
6525AA00AS	25,4	13,0	Ø 11,4	31,2	500
6553AA00AS	20,0	20,0	Ø 13,8	31,9	250
6554AA00AS	20,0	14,0	Ø 8,5	26,2	500
6555AA00AS	21,0	19,0	Ø 10,0	28,2	500
6556AA00AS	38,0	19,0	Ø 34,0	56,2	100
6557AA00AS	10,0	20,0	Ø 5,8	27,6	500
6558AA00AS	20,0	19,8	Ø 7,2	21,9	500
6559AA00AS	25,0	13,0	Ø 17,0	37,0	250

Codice	A	B	C	D	Conf./pezzi
6560AA00AS	25,0	13,0	Ø 20,0	39,0	250
6561AA00AS	28,0	15,0	Ø 23,0	41,0	250