

# SERRACAVI PER CAVI PIATTI



## Descrizione tecnica

**Materiale:** PA 6.6


**Colore:** nero

**Autoestinguenza:** V2 (UL94)

**Temperatura d'esercizio:** -35°C ~ +85°C




**F=** spessore del pannello

Tutte le quote sono in mm



CAVI PIATTI  
FLATCABLE

FORO DI MONTAGGIO  
MOUNTING HOLE

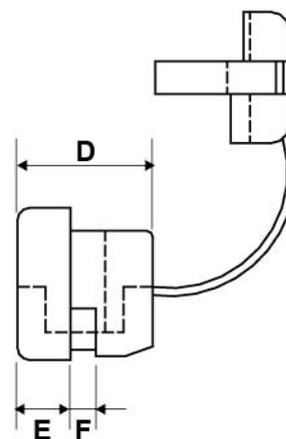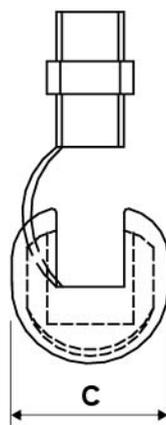

Codice	A	B	C	D	E	F	Ø Diametro cavo	Conf./pezzi
10862AA01	12,7	11,8	14,0	12,4	4,0	1,8 - 2,5	4,1 X 8,6	1.000
10863AA01	14,3	13,4	15,5	15,4	6,2	0,8 - 1,6	5,0 X 10,0	1.000
10864AA01	14,3	13,4	15,5	15,4	6,2	1,8 - 3,2	5,0 X 10,0	1.000

Codice	A	B	C	D	E	F	Ø Diametro cavo	Conf./pezzi
10865AA01	15,9	14,0	16,5	14,9	5,8	2,0 - 2,5	3,6 X 7,0 - 4,1 X 10,4	1.000
10866AA01	9,5	8,7	10,4	10,4	4,0	1,6	2,8 X 5,3	1.000
10867AA01	11,0	9,9	11,5	10,4	4,0	1,6	2,0 X 5,6	1.000
10868AA01	11,0	9,9	11,5	10,4	4,0	2,5	2,0 X 5,6	1.000
10869AA01	12,7 - 13,1	11,8	13,3	10,4	4,0	1,6	per A=12,7: 3,8 X 7,1 / per A=13,1: 4,1 X 7,6	1.000