

SUPPORTO PER CIRCUITI STAMPATI



Descrizione tecnica


Materiale: PA 6.6

Colore: Naturale

Autoestinguenza: V2 (UL94)

Temperatura esercizio: -35°C ~ +85°C

Tutte le quote sono in mm

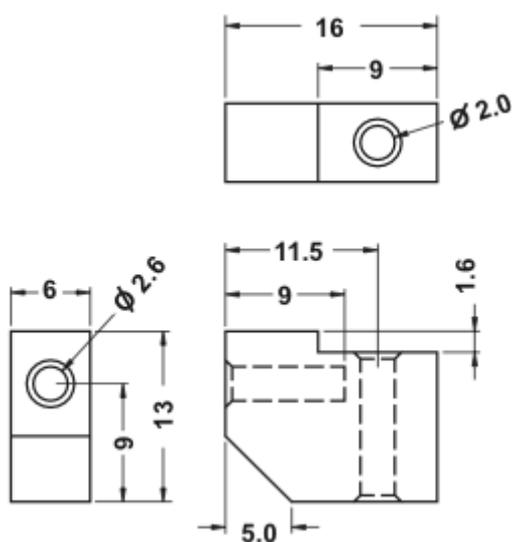

Codice	A	B	C	D	E	F	G	H	I	J	K	Autoestinguenza	Conf./pezzi
6113AA00	16,0	9,0	11,5	9,0	1,6	5,0	6,0	13,0	9,0	Ø2,0	Ø2,6	V2 (UL94)	500
6113AR00	16,0	9,0	11,5	9,0	1,6	5,0	6,0	13,0	9,0	Ø2,0	Ø2,6	V0 (UL94)	500