

TAPPI CON FORI DI SFIATO FILTRATI



Descrizione tecnica



Materiale: PA 6.6

Colore: nero

Autoestinguenza: V2 (UL 94)

Temperatura esercizio: -40°C ~ +105°C

Tutte le quote sono in mm

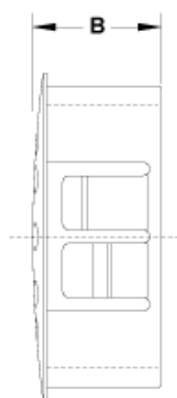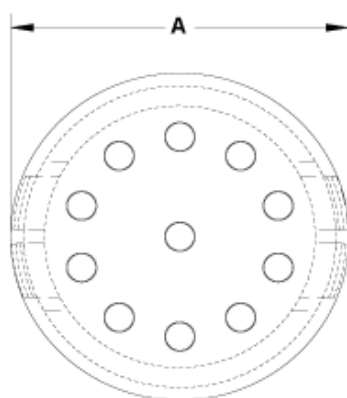

Codice	A	B	Foro	Spessore	Conf./pezzi
18023AA01	14,2	10,4	Ø 12,7	max. 3,2	1.000
18024AA01	25,8	11,5	Ø 22,2	max. 3,2	100
18025AA01	30,6	11,5	Ø 25,4	max. 3,2	100
18026AA01	30,9	11,5	Ø 27,8	max. 3,2	100
18027AA01	38,1	11,5	Ø 28,6	max. 3,2	100
18028AA01	42,4	11,5	Ø 34,9	max. 3,2	100
18029AA01	54,4	11,9	Ø 50,8	max. 3,2	100

Codice	A	B	Foro	Spessore	Conf./pezzi
18030AA01	25,8	14,3	Ø 22,2	Max. 6,4	100
18031AA01	30,6	14,3	Ø 25,4	Max. 6,4	100
18032AA01	30,9	14,3	Ø 27,8	Max. 6,4	100
18033AA01	38,1	14,3	Ø 28,6	Max. 6,4	100
18034AA01	42,4	14,3	Ø 34,9	Max. 6,4	100
18035AA01	54,4	14,7	Ø 50,8	Max. 6,4	100
18036AA01	69,0	19,1	63,5	Max. 6,4	100
18037AA01	80,0	18,8	Ø 76,2	Max. 6,4	100