

TAPPI FILETTATI IN OTTONE PG IP68



Descrizione tecnica


Materiale: Ottone nichelato

O-ring: NBR

Grado di protezione: IP68

PG secondo DIN 40430

Tutte le quote sono in mm

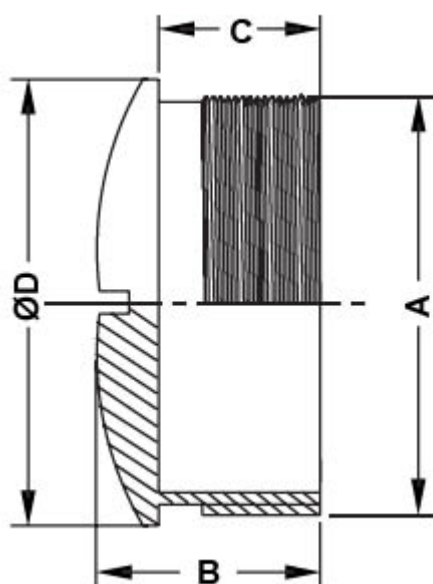

Codice	A	B	C	D	Conf./pezzi
13551MA92	PG 7	8,0	5,0	14,0	100
13552MA92	PG 9	9,0	6,0	17,0	50
13553MA92	PG 11	9,0	6,0	20,0	50

Codice	A	B	C	D	Conf./pezzi
13554MA92	PG 13.5	9,5	6,5	22,0	50
13555MA92	PG 16	9,5	6,5	24,0	50
13556MA92	PG 21	11,0	7,0	30,0	25
13557MA92	PG 29	12,0	8,0	39,0	20
13558MA92	PG 36	15,0	9,0	50,0	10
13559MA92	PG 42	16,0	10,0	57,0	10
13560MA92	PG 48	16,0	10,0	64,0	5