

TAPPO FILETTATO METRICO IP 65



RAL 7001



RAL 7035



Descrizione tecnica

Materiale: PA 6

Temperatura d'esercizio: -30°C ~ +100° C


Autoestinguenza : HB (UL94)

Colore: Vedi tabella

Metrico a norma EN 60423

Grado di protezione = IP65

Tutte le quote sono in mm

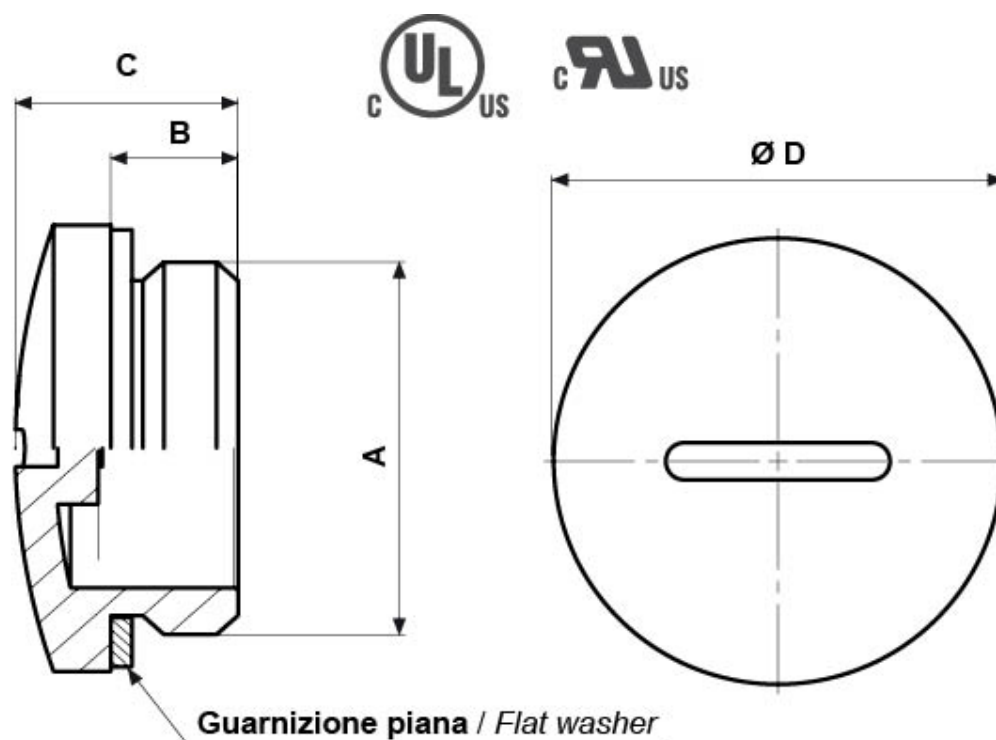

Codice	A	B	C	D	Colore	Conf./pezzi
8881AA019005	M12x1,5	6,0	10,0	15,0	RAL 9005	100
8881AA117001	M12x1,5	6,0	10,0	15,0	RAL 7001	100
8881AA117035	M12x1,5	6,0	10,0	15,0	RAL 7035	100
8882AA019005	M16x1,5	6,0	10,5	20,0	RAL 9005	100
8882AA117001	M16x1,5	6,0	10,5	20,0	RAL 7001	100
8882AA117035	M16x1,5	6,0	10,5	20,0	RAL 7035	100
8883AA019005	M20x1,5	6,0	10,5	24,0	RAL 9005	100
8883AA117001	M20x1,5	6,0	10,5	24,0	RAL 7001	100
8883AA117035	M20x1,5	6,0	10,5	24,0	RAL 7035	100
8884AA019005	M25x1,5	8,0	13,0	30,0	RAL 9005	100
8884AA117001	M25x1,5	8,0	13,0	30,0	RAL 7001	100
8884AA117035	M25x1,5	8,0	13,0	30,0	RAL 7035	100
8885AA019005	M32x1,5	8,0	13,5	37,0	RAL 9005	100
8885AA117001	M32x1,5	8,0	13,5	37,0	RAL 7001	100
8885AA117035	M32x1,5	8,0	13,5	37,0	RAL 7035	100
8886AA019005	M40x1,5	8,0	14,0	46,0	RAL 9005	50
8886AA117001	M40x1,5	8,0	14,0	46,0	RAL 7001	50

Codice	A	B	C	D	Colore	Conf./pezzi
8886AA117035	M40x1,5	8,0	14,0	46,0	RAL 7035	50
8887AA019005	M50x1,5	10,0	16,5	56,0	RAL 9005	50
8887AA117001	M50x1,5	10,0	16,5	56,0	RAL 7001	50
8887AA117035	M50x1,5	10,0	16,5	56,0	RAL 7035	50
8888AA019005	M63x1,5	12,0	17,0	70,0	RAL 9005	50
8888AA117001	M63x1,5	12,0	17,0	70,0	RAL 7001	50
8888AA117035	M63x1,5	12,0	17,0	70,0	RAL 7035	50