

VITI A TESTA ESAGONALE CON INTAGLIO



Descrizione tecnica


Materiale: PA 6.6

Colore: naturale

Autoestinguenza: V2 (UL 94)

Temperatura esercizio: -35°C ~ +85°C

Tutte le quote sono in mm

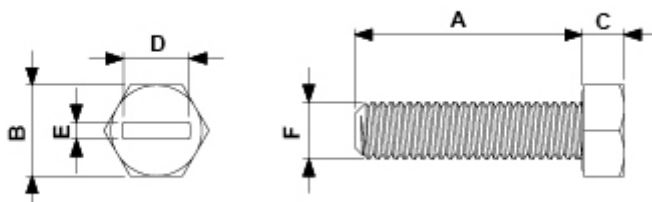

Codice	A	B	C	D	E	F	Conf./pezzi
0500AA00	10,0	7,0	2,8	5,0	1,1	M 4x0,7	1.000
0502AA00	15,0	7,0	2,8	5,0	1,1	M 4x0,7	1.000
0503AA00	20,0	7,0	2,8	5,0	1,1	M 4x0,7	1.000
0504AA00	25,0	7,0	2,8	5,0	1,1	M 4x0,7	1.000
0505AA00	30,0	7,0	2,8	5,0	1,1	M 4x0,7	1.000
0507AA00	20,0	17,0	7,0	12,8	2,0	M 10x1,5	1.000
0508AA00	25,0	17,0	7,0	12,8	2,0	M 10x1,5	1.000
0509AA00	30,0	17,0	7,0	12,8	2,0	M 10x1,5	1.000
0510AA00	35,0	17,0	7,0	12,8	2,0	M 10x1,5	1.000
0516AA00	20,0	10,0	4,3	7,8	1,5	M 6x1	1.000

Codice	A	B	C	D	E	F	Conf./pezzi
0517AA00	25,0	10,0	4,3	7,8	1,5	M 6x1	1.000
0518AA00	30,0	10,0	4,3	7,8	1,5	M 6x1	1.000
0532AA00	10,0	8,0	3,7	6,0	1,4	M 5x0,8	1.000
0533AA00	15,0	8,0	3,7	6,0	1,4	M 5x0,8	1.000
0535AA00	25,0	8,0	3,7	6,0	1,4	M 5x0,8	1.000
0536AA00	30,0	8,0	3,7	6,0	1,4	M 5x0,8	1.000
0542AA00	15,0	13,0	5,8	9,8	1,9	M 8x1,25	1.000
0543AA00	20,0	13,0	5,8	9,8	1,9	M 8x1,25	1.000
0544AA00	25,0	13,0	5,8	9,8	1,9	M 8x1,25	1.000
0545AA00	30,0	13,0	5,8	9,8	1,9	M 8x1,25	1.000
0546AA00	35,0	13,0	5,8	9,8	1,9	M 8x1,25	1.000
3162AA00	10,0	12,5	2,8	-	-	M 4x0,7	1.000
4006AA00	15,0	10,0	4,3	7,8	1,5	M 6x1	1.000