

DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm IIP	±1.0

	REVISIONS				
REV	DESCRIPTION	DATE	BY		

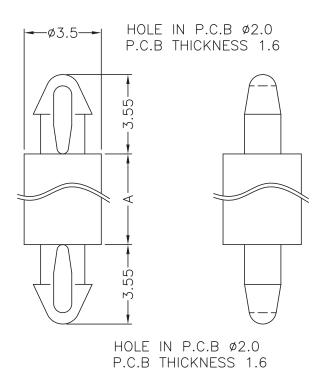

PART NO.	Α
8437 AA00	2,2
8438 AA00	3,0
8439 AA00	4,0
8440 AA00	5,0
8441 AA00	6,0
8442 AA00	8,0
8443 AA00	10,0

NOTE: All measurement does not include gate which raises under 0.3 mm.



SPACER SUPPORT		
NYLON 66 UL94V - 2	07/09/2015	
	S.P.	
NATURAL	CHECK	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED	