DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

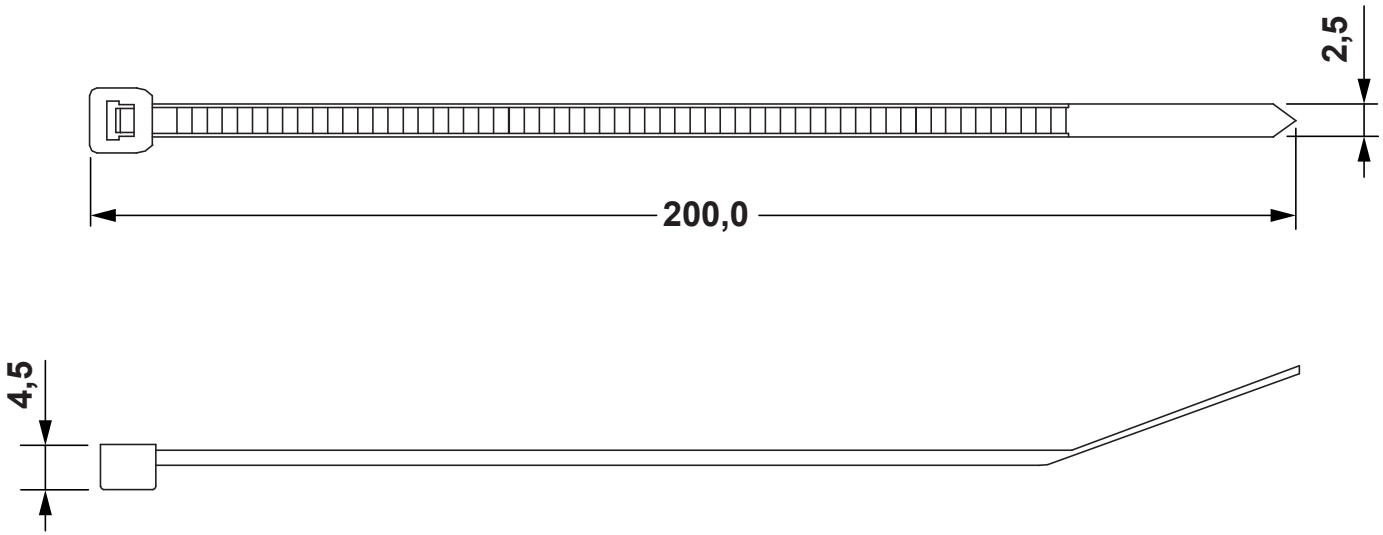

NOTES:
OPERATING TEMPERATURE: -40°C ~ +85°C
MAX. CABLE DIAMETER: 52,0 mm
MIN. LOOP TENSILE STRENGHT: 8,10 kg

	DESCRIPTION		TITLE: **CABLE TIES STANDARD**			DWG UNIT: MM
	MATERIAL: PA66 V2 (UL94)		*Modelled in RHINO 4.0*	FILE:	DwN: 18.02.26.0382.0.E	ChkD: ,
	COLOUR: NATURAL		TOLLERANCES UNLESS NOTED	SHEET: 1 OF 1	DT: 26/02/18	Part Number: 0382AA00
REV.		DATE	SEE ABOVE	SCALE: NTS	fastpoint	