



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

**HOLE IN P.C.B: Ø4,0  
P.C.B THICKNESS:1,6**

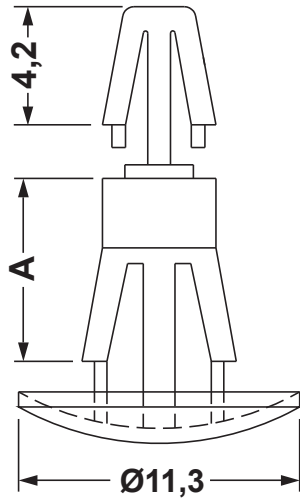

**HOLE IN P.C.B: Ø4,0  
P.C.B THICKNESS:1,6**

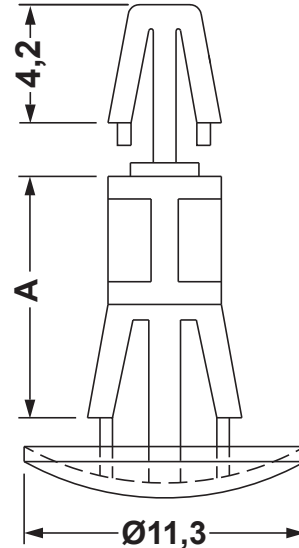


**HOLE IN CHASSIS: Ø5,5  
CHASSIS THICKNESS: 1,5 - 2,2**

PART NO.	A
<b>11462AA0003.5</b>	3.5
<b>11462AA0005.0</b>	5.0
<b>11462AA0006.3</b>	6.3
<b>11462AA0008.0</b>	8.0

**HOLE IN CHASSIS: Ø5,5  
CHASSIS THICKNESS: 1,5 - 2,2**

PART NO.	A
<b>11462AA0010.0</b>	10.0
<b>11462AA0012.7</b>	12.7
<b>11462AA0015.9</b>	15.9
<b>11462AA0019.0</b>	19.0
<b>11462AA0025.4</b>	25.4
<b>11462AA0035.5</b>	35.5

				TITLE <b>SPACER SUPPORT</b>	
				MATERIAL PA66 V2(UL94)	DATE 14/03/2018
PART NUMBER SEE TABLE DRAWING NUMBER 18.03.14.11462.0.E				DRAWN R.F.	
				COLOR NATURAL	
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
				APPROVED	