


REVISIONS			
REV	DESCRIPTION	DATE	BY

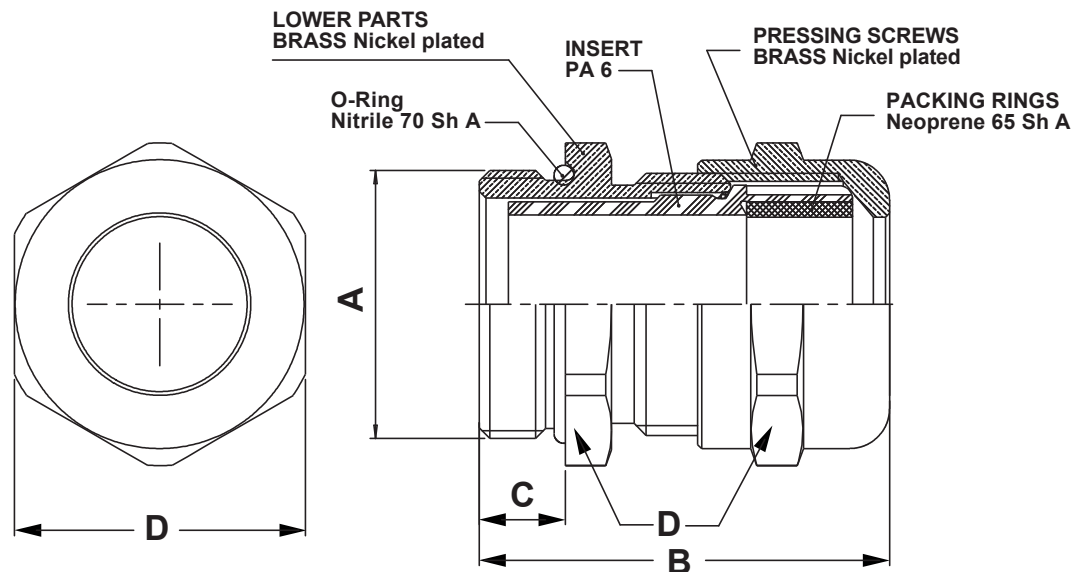



**Standard  
Sealing**

**IP 68**

**Permanent  
temperature  
on application  
- 40 / + 100°C**

P/N	A	B	C	D	Cable diameter
<b>15164MA92</b>	M 12	25,0	5,0	14,0	2,5 - 6,5
<b>15165MA92</b>	M 16	28,0	5,0	17,0	4,0 - 9,5
<b>15166MA92</b>	M 20	32,0	6,0	22,0	7,0 - 13,0
<b>15167MA92</b>	M 25	35,0	7,0	27,0	8,0 - 16,0
<b>15168MA92</b>	M 32	38,0	8,0	34,0	11,0 - 21,0
<b>15169MA92</b>	M 40	41,0	8,0	42,0	15,0 - 27,0
<b>15170MA92</b>	M 50	46,0	9,0	55,0	22,0 - 35,0
<b>15171MA92</b>	M 63	54,0	10,0	65,0	35,0 - 48,0



	DESCRIPTION		TITLE: METRIC THREAD BRASS CABLE GLANDS			DWG UNIT: MM
MATERIAL:	SEE ABOVE		Modelled in RHINO 4.0		FILE:	DwN: 02/03/21
COLOUR:	SEE ABOVE		TOLLERANCES UNLESS NOTED		SHEET: 1 OF 1	ChkD: DT: 21.03.02.15164.0.E
			SEE ABOVE		SCALE: NTS	Part Number: SEE TABLE
REV		DATE	