


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

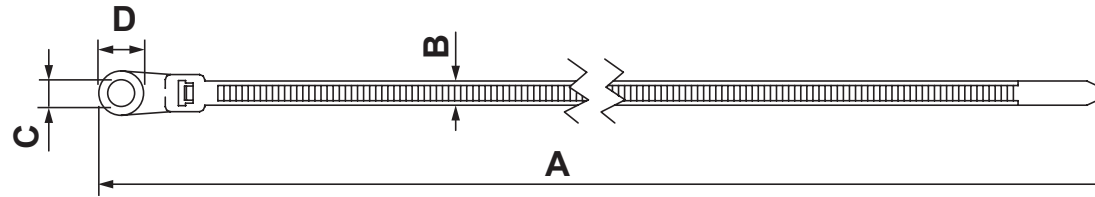

P/N	A	B	C	D	Max. cable diameter	Min. loop tensile strenght (Kg)
<b>4771AA00</b>	110,0	<b>2,5</b>	3,2	6,2	22,0	8,1
<b>2436AA00</b>	150,0	<b>3,6</b>	4,8	8,0	32,0	18,2
<b>2437AA00</b>	200,0	<b>4,8</b>	5,5	9,6	50,0	22,2
<b>4772AA00</b>	310,0	<b>4,8</b>	5,5	9,8	76,0	22,2
<b>2438AA00</b>	215,0	<b>7,6</b>	5,7	11,5	50,0	54,4
<b>2439AA00</b>	375,0	<b>7,6</b>	6,3	11,5	98,0	54,4

REV.	DESCRIPTION	DATE	TITLE: SCREW MOUNTING CABLE TIES	DWG UNIT: MM
	MATERIAL: PA 6.6 V2(UL94)		Modelled in RHINO 4.0	
	COLOUR: NATURAL		FILE:	DwN: 05/05/21
	WORKING TEMPERATURE: -35°C ~ +85°C		TOLLERANCES UNLESS NOTED	ChkD: DT: 21.05.05.XXXX.0. Part Number: SEE TABLE
			SEE ABOVE	
			SHEET: 1 OF 1	
			SCALE: NTS	

