


P/N	A
8165AA0103.0	3.0
8165AA0104.0	4.0
8165AA0105.0	5.0
8165AA0106.0	6.0
8165AA0107.0	7.0
8165AA0108.0	8.0
8165AA0109.0	9.0
8165AA0110.0	10.0
8165AA0111.0	11.0
8165AA0112.0	12.0
8165AA0113.0	13.0
8165AA0114.0	14.0
8165AA0115.0	15.0
8165AA0116.0	16.0
8165AA0117.0	17.0
8165AA0118.0	18.0
8165AA0119.0	19.0
8165AA0120.0	20.0
8165AA0121.0	21.0
8165AA0122.0	22.0
8165AA0123.0	23.0
8165AA0124.0	24.0
8165AA0125.0	25.0
8165AA0126.0	26.0
8165AA0127.0	27.0
8165AA0128.0	28.0
8165AA0129.0	29.0
8165AA0130.0	30.0
8165AA0131.0	31.0
8165AA0132.0	32.0
8165AA0133.0	33.0
8165AA0134.0	34.0

P/N	A
8165AA0135.0	35.0
8165AA0136.0	36.0
8165AA0137.0	37.0
8165AA0138.0	38.0
8165AA0139.0	39.0
8165AA0140.0	40.0
8165AA0141.0	41.0
8165AA0142.0	42.0
8165AA0143.0	43.0
8165AA0144.0	44.0
8165AA0145.0	45.0
8165AA0146.0	46.0
8165AA0147.0	47.0
8165AA0148.0	48.0
8165AA0149.0	49.0
8165AA0150.0	50.0
8165AA0151.0	51.0
8165AA0152.0	52.0
8165AA0153.0	53.0
8165AA0154.0	54.0
8165AA0155.0	55.0
8165AA0156.0	56.0
8165AA0157.0	57.0
8165AA0158.0	58.0
8165AA0159.0	59.0
8165AA0160.0	60.0
8165AA0161.0	61.0
8165AA0162.0	62.0
8165AA0163.0	63.0
8165AA0164.0	64.0
8165AA0165.0	65.0
8165AA0166.0	66.0

P/N	A
8165AA0167.0	67.0
8165AA0168.0	68.0
8165AA0169.0	69.0
8165AA0170.0	70.0
8165AA0171.0	71.0
8165AA0172.0	72.0
8165AA0173.0	73.0
8165AA0174.0	74.0
8165AA0175.0	75.0
8165AA0176.0	76.0
8165AA0177.0	77.0

DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

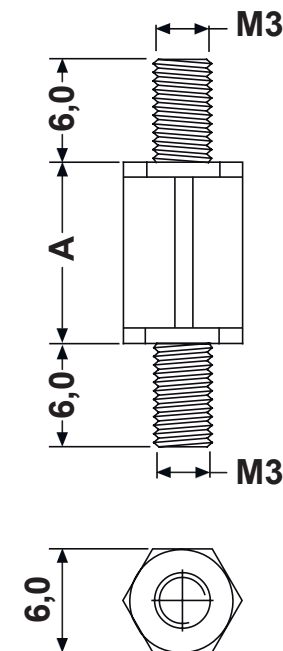

	DESCRIPTION	TITLE: HEXAGONAL METRIC THREADED SPACERS	DWG UNIT: MM
	MATERIAL: PA 66 HB(UL94)	Modelled in RHINO 4.0	FILE:
	COLOUR: BLACK	TOLLERANCES UNLESS NOTED	SHEET: 1 OF 1
	WORKING TEMPERATURE: -35°C ~ +130°C	SEE ABOVE	SCALE: NTS
REV.	DATE		

DwN: 31/05/21
 ChkD:
 DT: 21.05.31.8165.0.E. | Part Number: SEE TABLE