


P/N	A
8166AA0103.0	3.0
8166AA0104.0	4.0
8166AA0105.0	5.0
8166AA0106.0	6.0
8166AA0107.0	7.0
8166AA0108.0	8.0
8166AA0109.0	9.0
8166AA0110.0	10.0
8166AA0111.0	11.0
8166AA0112.0	12.0
8166AA0113.0	13.0
8166AA0114.0	14.0
8166AA0115.0	15.0
8166AA0116.0	16.0
8166AA0117.0	17.0
8166AA0118.0	18.0
8166AA0119.0	19.0
8166AA0120.0	20.0
8166AA0121.0	21.0
8166AA0122.0	22.0
8166AA0123.0	23.0
8166AA0124.0	24.0
8166AA0125.0	25.0
8166AA0126.0	26.0
8166AA0127.0	27.0
8166AA0128.0	28.0
8166AA0129.0	29.0
8166AA0130.0	30.0
8166AA0131.0	31.0
8166AA0132.0	32.0
8166AA0133.0	33.0
8166AA0134.0	34.0

P/N	A
8166AA0135.0	35.0
8166AA0136.0	36.0
8166AA0137.0	37.0
8166AA0138.0	38.0
8166AA0139.0	39.0
8166AA0140.0	40.0
8166AA0141.0	41.0
8166AA0142.0	42.0
8166AA0143.0	43.0
8166AA0144.0	44.0
8166AA0145.0	45.0
8166AA0146.0	46.0
8166AA0147.0	47.0
8166AA0148.0	48.0
8166AA0149.0	49.0
8166AA0150.0	50.0
8166AA0151.0	51.0
8166AA0152.0	52.0
8166AA0153.0	53.0
8166AA0154.0	54.0
8166AA0155.0	55.0
8166AA0156.0	56.0
8166AA0157.0	57.0
8166AA0158.0	58.0
8166AA0159.0	59.0
8166AA0160.0	60.0
8166AA0161.0	61.0
8166AA0162.0	62.0
8166AA0163.0	63.0
8166AA0164.0	64.0
8166AA0165.0	65.0

DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

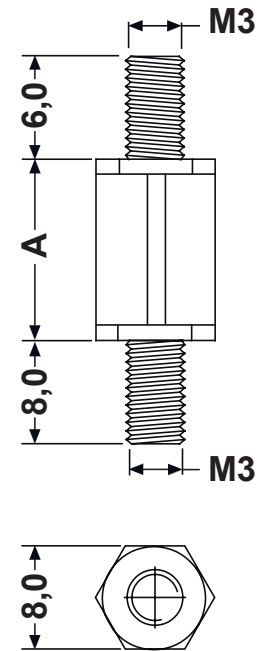

	DESCRIPTION	TITLE: HEXAGONAL METRIC THREADED SPACERS	DWG UNIT: MM
	MATERIAL: PA 66 HB(UL94)	Modelled in RHINO 4.0	FILE:
	COLOUR: BLACK	TOLLERANCES UNLESS NOTED	SHEET: 1 OF 1
	WORKING TEMPERATURE: -35°C ~ +130°C	SEE ABOVE	SCALE: NTS
REV.	DATE		

DwN: 31/05/21
 ChkD:
 DT: 21.05.31.8164.0.E. | Part Number: SEE TABLE

