
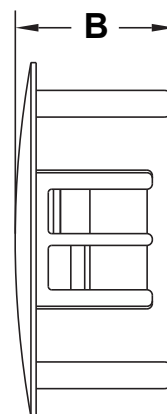


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

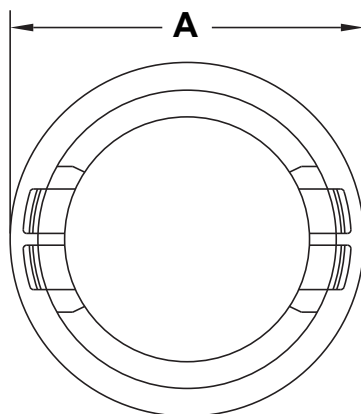

P/N	A	B	Hole
5773AR01	11,9	10,3	Ø 9,5
5774AR01	13,5	10,3	Ø 11,1
5775AR01	14,7	10,3	Ø 12,7
5777AR01	18,2	10,3	Ø 15,9
5779AR01	23,4	10,3	Ø 19,1
5781AR01	25,8	11,5	Ø 22,2
5782AR01	30,6	11,5	Ø 25,4
5783AR01	30,9	11,5	Ø 27,8 - 28,6
5785AR01	34,9	11,5	Ø 31,7
5786AR01	38,1	11,5	Ø 34,9
5787AR01	42,8	11,5	Ø 38,1
5788AR01	48,7	11,5	Ø 44,5
5789AR01	55,1	11,9	Ø 50,8

NOTES:

- WORKING TEMPERATURE: -40°C +105°C
- PANEL THICKNESS: 3,2
- UV RESISTANT
- AVAILABLE ON SPECIAL REQUEST

				TITLE V0 HOLE PLUGS UV RESISTANT	
				MATERIAL PA66 V0(UL94)	DATE 09/12/2021
PART NUMBER SEE TABLE				DRAWN A.C.	
				DRAWING NUMBER 21.12.09.5773.0.E	
SIZE A4				COLOR BLACK	
				CHECK	
SCALE NTS		UNIT mm.		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
REV A		APPROVED			