DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

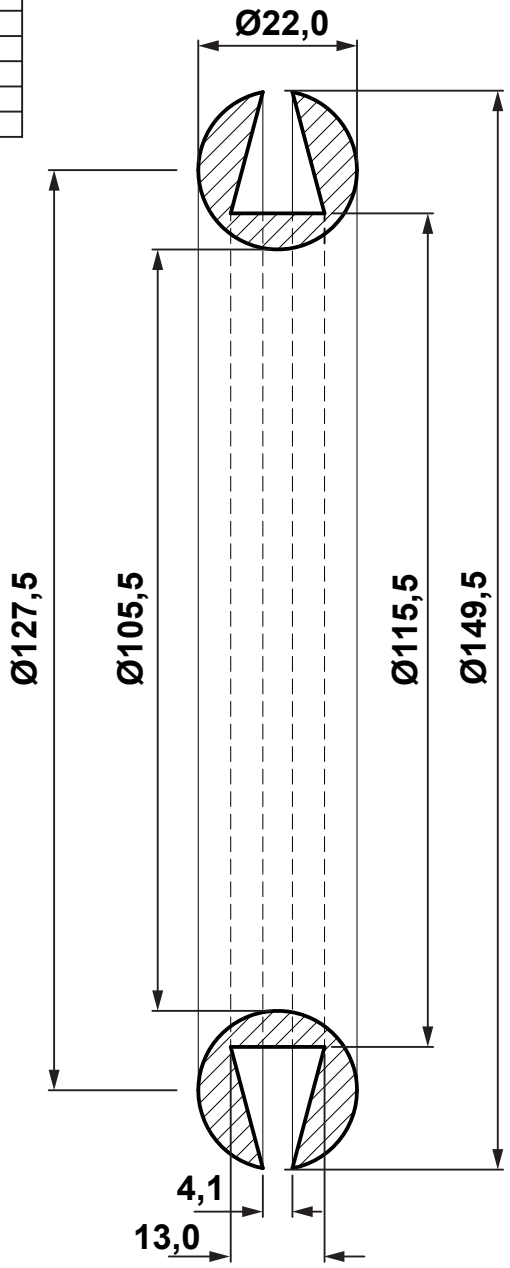

HALOGEN FREE

RoHS compliant

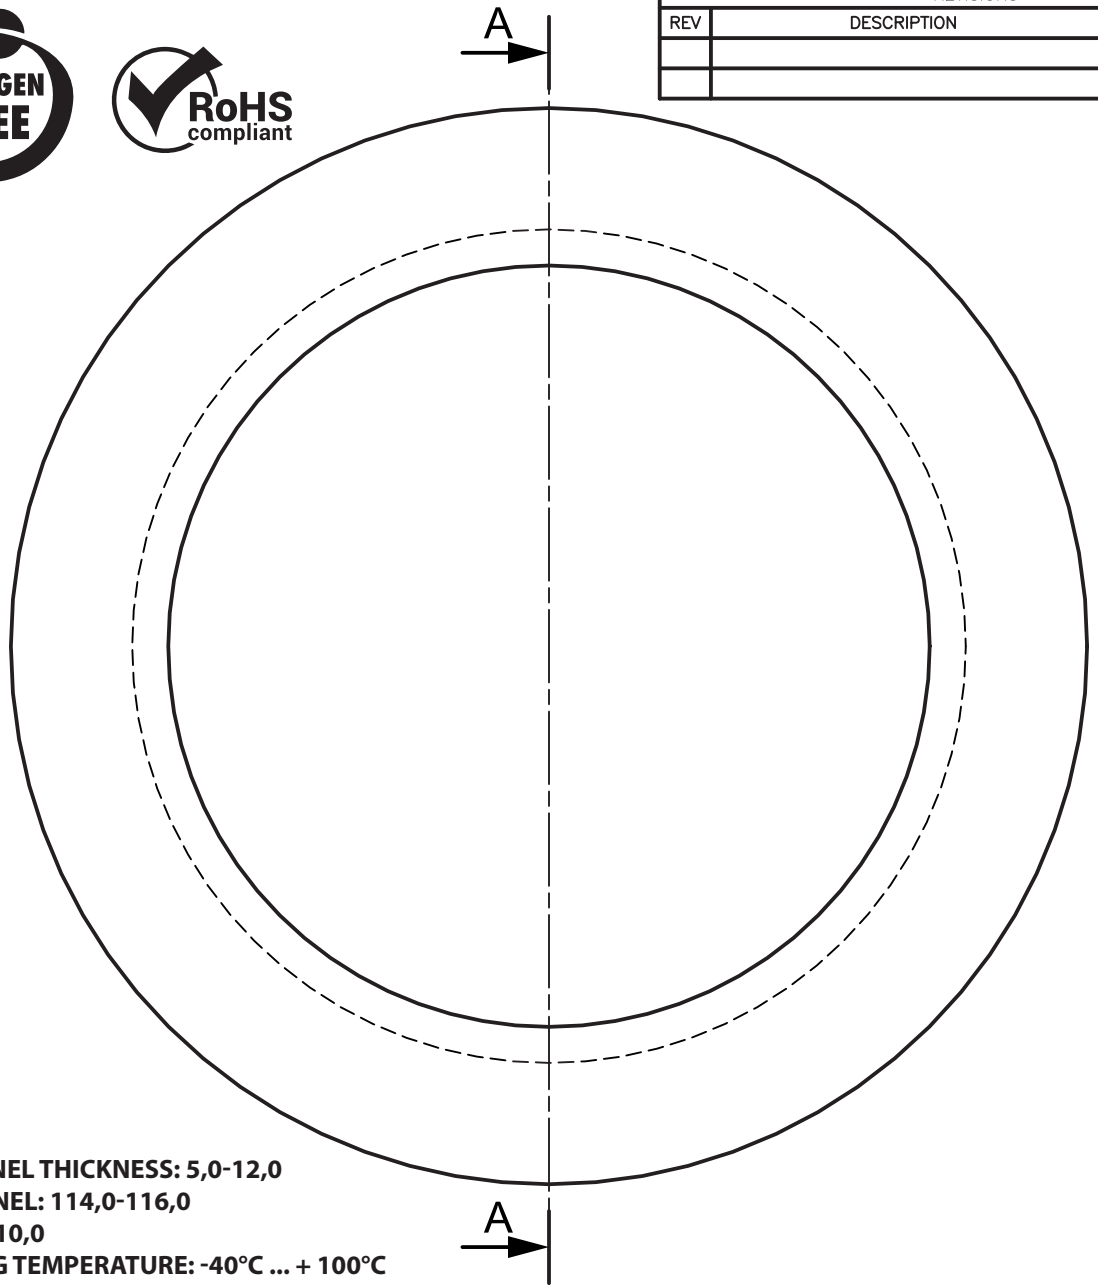

MAX. PANEL THICKNESS: 5,0-12,0
HOLE PANEL: 114,0-116,0
PIPE Ø: 110,0
WORKING TEMPERATURE: -40°C ... + 100°C

	DESCRIPTION	
	MATERIAL: TPE-SEBS	
	COLOUR: NATURAL	
REV.		DATE

TITLE: **RETROFITTING SEAL**

Modelled in RHINO 4.0

TOLLERANCES UNLESS NOTED

SEE ABOVE

FILE:

SHEET: 1 OF 1

SCALE: NTS

DwN: 28/04/22

DT: 22.04.28.17936.0.E.

DWG UNIT: MM

ChkD:

Part Number: 17936PS01

fastpoint