
DIM.	TOL.
5mm DOWN	±0.2
5∼20mm	±0.3
20~40mm	±0.4
40∼60mm	±0.5
60∼100mm	±0.8
100mm UP	±1.0

REVISIONS					
REV	DESCRIPTION	DATE	BY		

P/N	Α
10050AA0103.0	3.0
10050AA0104.0	4.0
10050AA0105.0	5.0
10050AA0106.0	6.0
10050AA0107.0	7.0
10050AA0108.0	8.0
10050AA0109.0	9.0
10050AA0110.0	10.0
10050AA0111.0	11.0
10050AA0112.0	12.0
10050AA0113.0	13.0
10050AA0114.0	14.0
10050AA0115.0	15.0
10050AA0116.0	16.0
10050AA0117.0	17.0
10050AA0118.0	18.0
10050AA0119.0	19.0
10050AA0120.0	20.0
10050AA0121.0	21.0
10050AA0122.0	22.0
10050AA0123.0	23.0
10050AA0124.0	24.0
10050AA0125.0	25.0
10050AA0126.0	26.0
10050AA0127.0	27.0

P/N	
400=0440000	Α
10050AA0128.0	28.0
10050AA0129.0	29.0
10050AA0130.0	30.0
10050AA0131.0	31.0
10050AA0132.0	32.0
10050AA0133.0	33.0
10050AA0134.0	34.0
10050AA0135.0	35.0
10050AA0136.0	36.0
10050AA0137.0	37.0
10050AA0138.0	38.0
10050AA0139.0	39.0
10050AA0140.0	40.0
10050AA0141.0	41.0
10050AA0142.0	42.0
10050AA0143.0	43.0
10050AA0144.0	44.0
10050AA0145.0	45.0
10050AA0146.0	46.0
10050AA0147.0	47.0
10050AA0148.0	48.0
10050AA0149.0	49.0
10050AA0150.0	50.0
10050AA0151.0	51.0
10050AA0152.0	52.0

P/N	Α
10050AA0153.0	53.0
10050AA0154.0	54.0
10050AA0155.0	55.0
10050AA0156.0	56.0
10050AA0157.0	57.0
10050AA0158.0	58.0
10050AA0159.0	59.0
10050AA0160.0	60.0
10050AA0161.0	61.0
10050AA0162.0	62.0
10050AA0163.0	63.0
10050AA0164.0	64.0
10050AA0165.0	65.0

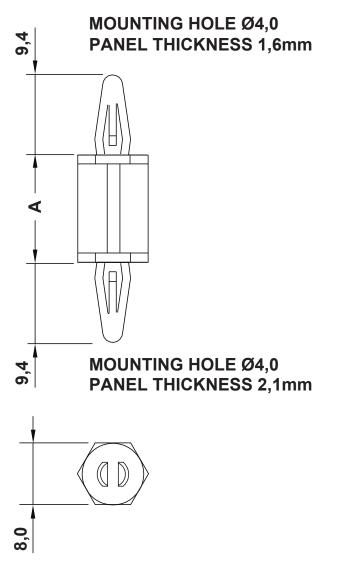

	DESCRIPTION		TITLE: DUAL LOCKING P.C.B SPACER		DWG UNIT:	
	MATERIAL: PA 66 HB(UL94)		111			T - 101101
	colour: BLACK		Modelled in RHINO 4.0		DwN: 19/05/22	IChkD:
	WORKING TEMPERATURE: -35°C ~ +130°C		TOLLERANCES	SHEET: 1 OF 1	DT: 22.05.19.10050.0.E.	Part Number: SEE TABLE
	1000		UNLESS NOTED	SCALE:		• •
				NTO		astpoint
			SEE ABOVE	NTS		JSLDOII IL
REV.		DATE				