
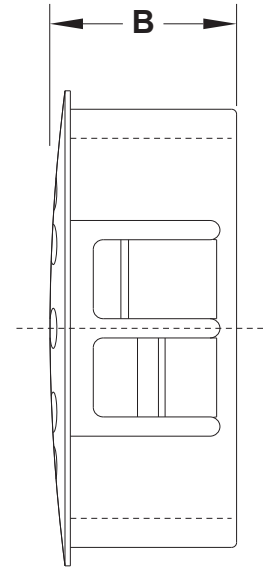



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

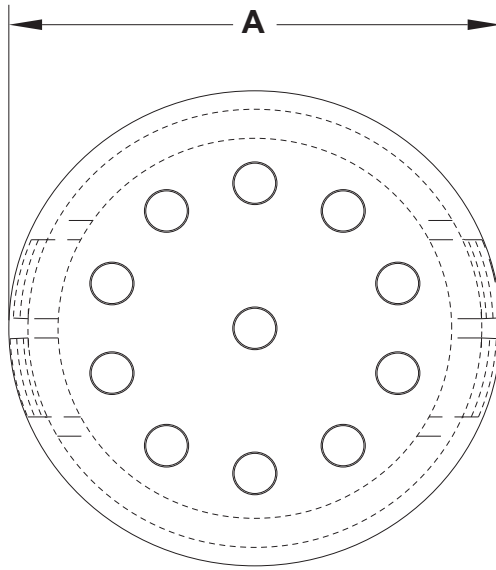

P/N	A	B	P. THICKNESS	HOLE	
18023AA01	14,2	10,4	UP TO 3,2	12,7	
18024AA01	25,8	11,5		22,2	
18025AA01	30,6			25,4	
18026AA01	30,9			27,8	
18027AA01	38,1			28,6	
18028AA01	42,4			34,9	
18029AA01	54,4			11,9	50,8
18030AA01	25,8	14,3	UP TO 6,4	22,2	
18031AA01	30,6			25,4	
18032AA01	30,9			27,8	
18033AA01	38,1			28,6	
18034AA01	42,4			34,9	
18035AA01	54,4			14,7	50,8
18036AA01	69,0			19,1	63,5
18037AA01	80,0	18,8	76,2		

WORKING TEMPERATURE: -40°C ... 105°C

				TITLE RUBBER GROMMETS	
				MATERIAL PA 66	
PART NUMBER SEE ABOVE				DRAWING NUMBER 22.06.07.180X.0.E	
				UL 94 V-2	
SIZE A4				COLOR BLACK	
				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
SCALE NTS		UNIT mm.		REV A	
				APPROVED	