



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

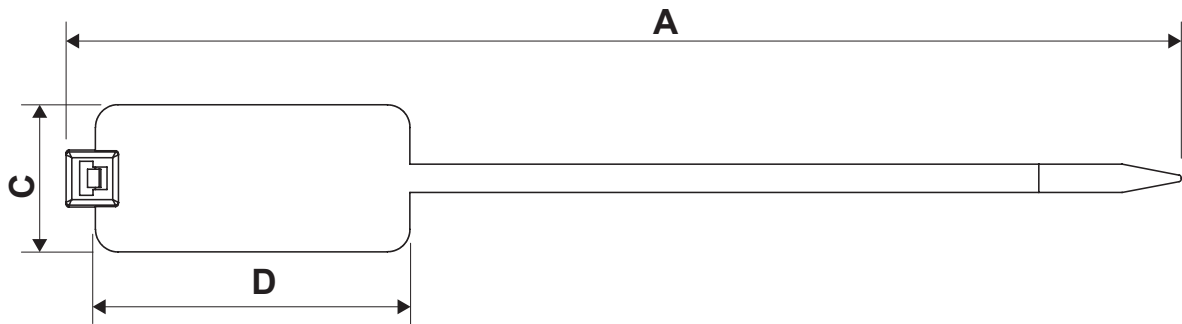

**MAX. CABLE: 48,0**  
**MIN. LOOP TENSILE STRENGTH (KG): 22,2**

P/N	A	B	C	D
2506AA00	190,0	4,8	13,0	28,5
2507AA00	270,0	4,8	13,0	28,5

		TITLE <b>MARKER TIES</b>	
		MATERIAL PA 66 V2(UL94)	DATE 20/09/2022
PART NUMBER SEE TABLE		DRAWING NUMBER 22/09/20.250	
DRAWING NUMBER 22/09/20.250		COLOR NATURAL	CHECK
SIZE A4	SCALE NTS	UNIT mm.	REV A
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED	