



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

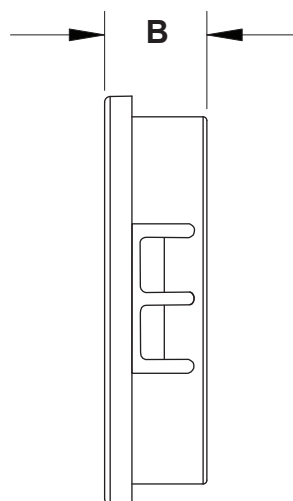

P/N	A	B	COLOR	P. THICKNESS	HOLE	
18046AA01	25,8	13,5	BLACK	UP TO 3,2	22,2	
18046AA02	25,8		WHITE		22,2	
18047AA01	30,6		BLACK		25,4	
18047AA02	30,6		WHITE		25,4	
17905AA01	30,9	13,8	BLACK		27,8-28,6	
17905AA02	30,9		WHITE		27,8-28,6	
17906AA01	38,1		BLACK		34,9	
17906AA02	38,1		WHITE		34,9	
18048AA01	42,6		BLACK		38,1	
18048AA02	42,6		WHITE		38,1	
17907AA01	55,1		BLACK		50,8	
17907AA02	55,1		WHITE		50,8	
18049AA01	69,8	20,9	BLACK		UP TO 6,4	63,5
18049AA02	69,8		WHITE			63,5
18050AA01	80,5		BLACK	76,2		
18050AA02	80,5		WHITE	76,2		

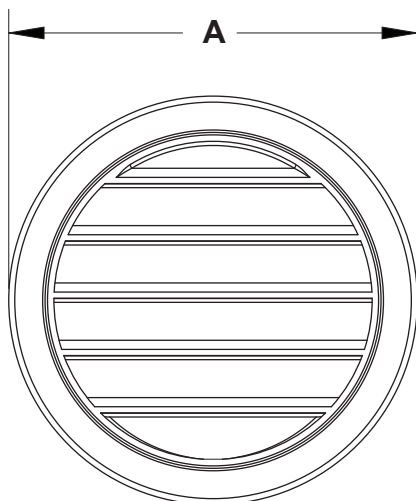

WORKING TEMPERATURE:-40°C ... 105°C

				TITLE LOUVERED PLUGS			
				MATERIAL PA 66		DATE 13/06/2022	
				UL 94 V-2		DRAWN A.C.	
PART NUMBER SEE ABOVE		DRAWING NUMBER 22.06.07.179X.0.E		COLOR SEE ABOVE		CHECK	
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED	